


**HD**

# 2200 Series

HD2200/2200M | HD2200C/2200MC

HYUNDAI WIA Heavy Duty Cutting CNC Turning Center

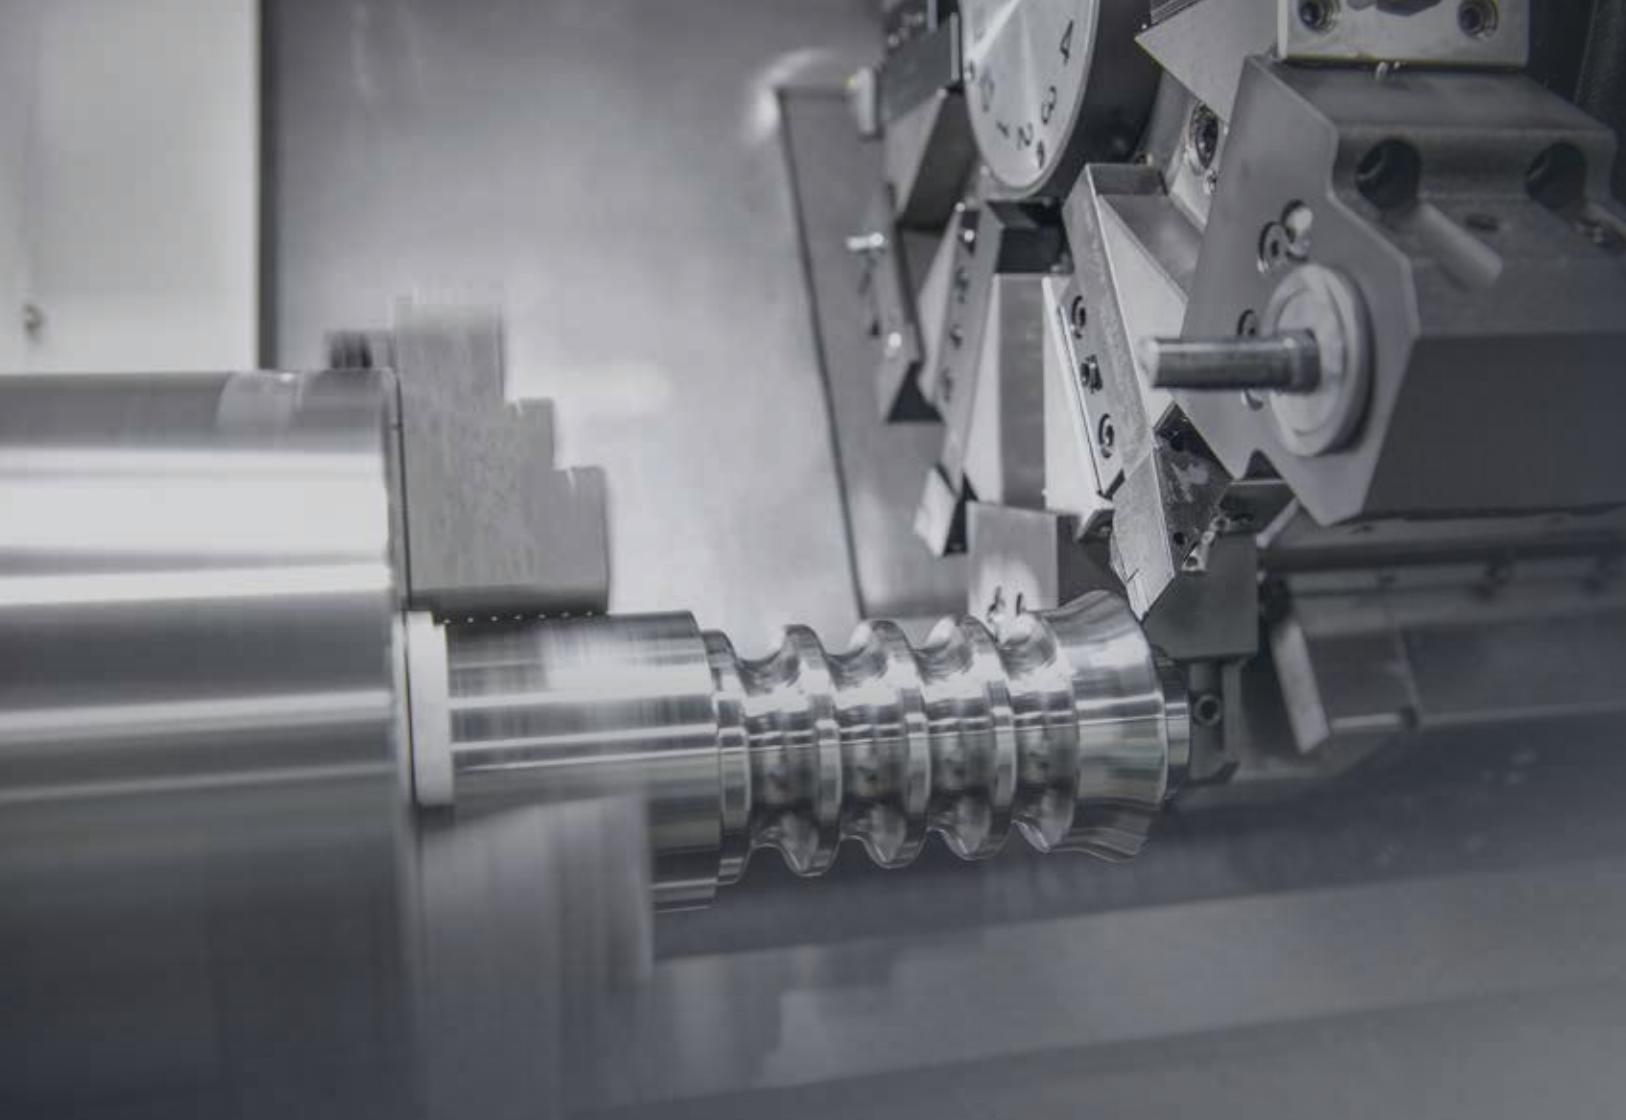

# Technical Leader ▶

The CNC Turning Center HD2200 Series, designed by Hyundai WIA with years of expertise and the latest technology, is a Turning Center that maximizes productivity and performance.

HD2200   HD2200C		HD2200M   HD2200MC
Max. Swing mm(in)	Ø550 (21.7")	Ø550 (21.7")
Max. Turning Length mm(in)	565 (22.2")   550 (21.7")	467 (18.4")   452 (17.8")
Chuck Size inch	8" [10"]   10"	8" [10"]   10"
Bar Capacity mm(in)	Ø65 (2.6")   Ø81 (3.2")	Ø65 (2.6")   Ø81 (3.2")
Spindle Speed (rpm) r/min	4,500 [4,000] <b>[4,000]</b>   3,500 <b>[3,500]</b>	4,500 [4,000] <b>[4,000]</b>   3,500 <b>[3,500]</b>
Spindle Motor (Max.) kW(hP)	18.5 (24.8) [18.5 (24.8)] <b>[23.6 (31.6)]</b>   18.5 (24.8) <b>[26.4 (35.4)]</b>	18.5 (24.8) [18.5 (24.8)] <b>[23.6 (31.6)]</b>   18.5 (24.8) <b>[26.4 (35.4)]</b>
Travel (X/Z) mm(in)	215/580 (8.5"/22.8")	215/482 (8.5"/19.1")
No. of Tools EA	12	12

[Option] ■ : iTROL

**HD**

# 2200 Series

Lathe with Box Guideways for Heavy Cutting

- Box guideways for heavy duty cutting
- 45° slanted one-piece bed structure for high rigidity
- Stabilized Unit Structure to minimize thermal displacement
- User convenient structure for high productivity
- Excellent rapid traverse rate: 30m/min [1,181ipm] (Z-axis)
- Reliable, high speed servo turret: 0.12sec/step
- Ergonomic design for convenient access to chuck and tool



# 01 BASIC STRUCTURE

High Productivity 8/10 inch CNC Turning Center for Heavy Duty Cutting

## Mill Turret ('M' Type)


- BMT55P (12 Station)
- 6,000 r/min
- Collet Size : Ø16 (Ø5/8") {ER25}

## High Precision Spindle

- Integral body & heat dissipating RIB structure.
- HD2200/2200M : 8" [10"]
- HD2200C/2200MC : 10"
- C-Axis Control : 0.001° ('M' Type)

## Tail Stock

- MT#4 [MT#5]
- Quill Dia. : Ø65 (2.6")  
[Opt. Ø100 (3.9")]

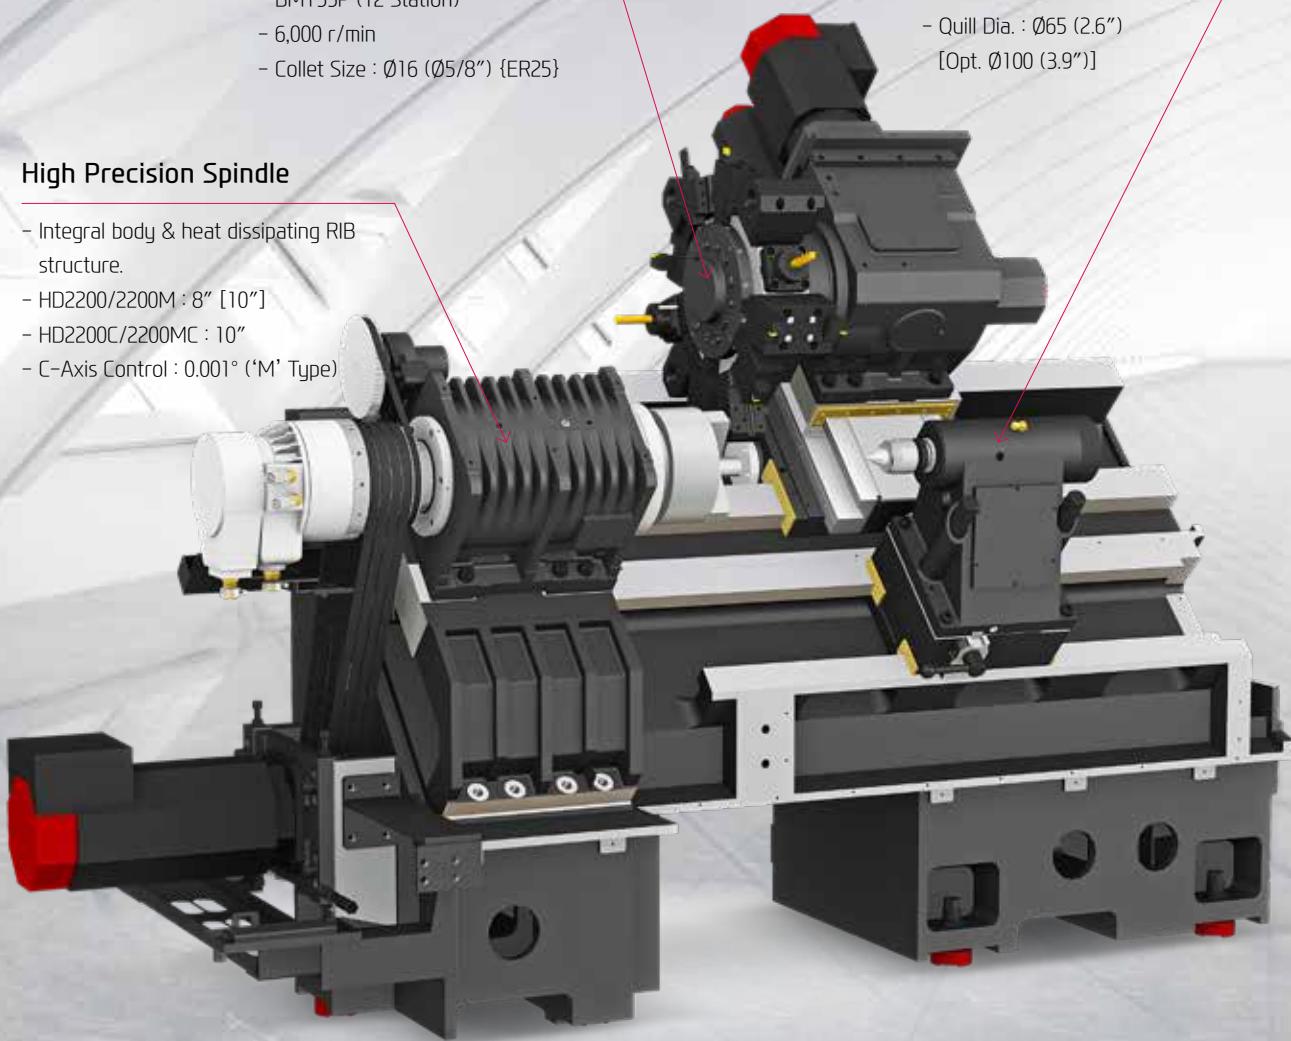

# POWERFUL CUTTING CAPABILITY & WIDE CUTTING AREA

## ALL-IN-ONE TYPE OF BED

### High Rigidity, One-Piece Structure

The bed structure of the HD2200 is designed with combination of square type and tubular rib structure. It has a slope of 45° which helps maintain high rigidity. It shows great performance in heavy duty cutting, absorbing vibration and maintaining accuracy.

### Integrated Coolant Tank

The coolant tank is installed at the front of the bed to prevent leakage, enabling stable machining with the use of high pressure coolant.



## GUIDEWAY

### Box Guideway

All axes of HD2200 are designed with Box Guideways for better travel ability. Box Guideways show great performance in offsetting vibrations caused by heavy duty cutting.


### Sealed GIB Structure

X-axis of HD2200 is designed to minimize the damage of turcite from chips by applying the sealed GIB structure.

### Z-Axis High Performance Motor

Z-axis feed ability is improved by installing high performance servo motor.


(Z-axis Rapid Traverse Rate : 30 m/min [1,181 ipm])

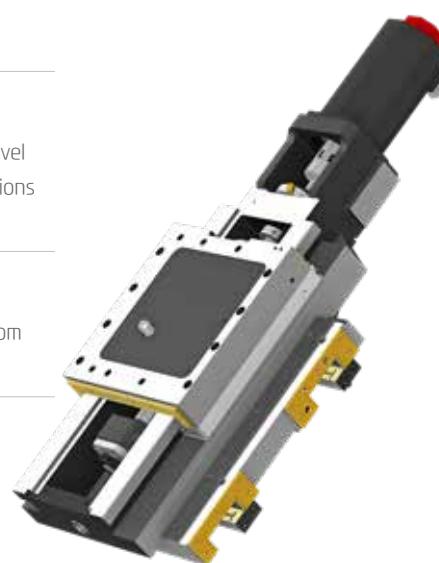

Rapid Traverse Rate (X/Z)	HD2200/C Travel (X/Z)	HD2200M/MC Travel (X/Z)
<b>24/30</b> m/min	<b>215/580</b> mm	<b>215/482</b> mm
(945/1,181 ipm)	(8.5"/22.8")	(8.5"/19")

# 02 HIGH PRECISION SPINDLE

Long Lasting, High Accuracy & Excellent Performance CNC Turning Center

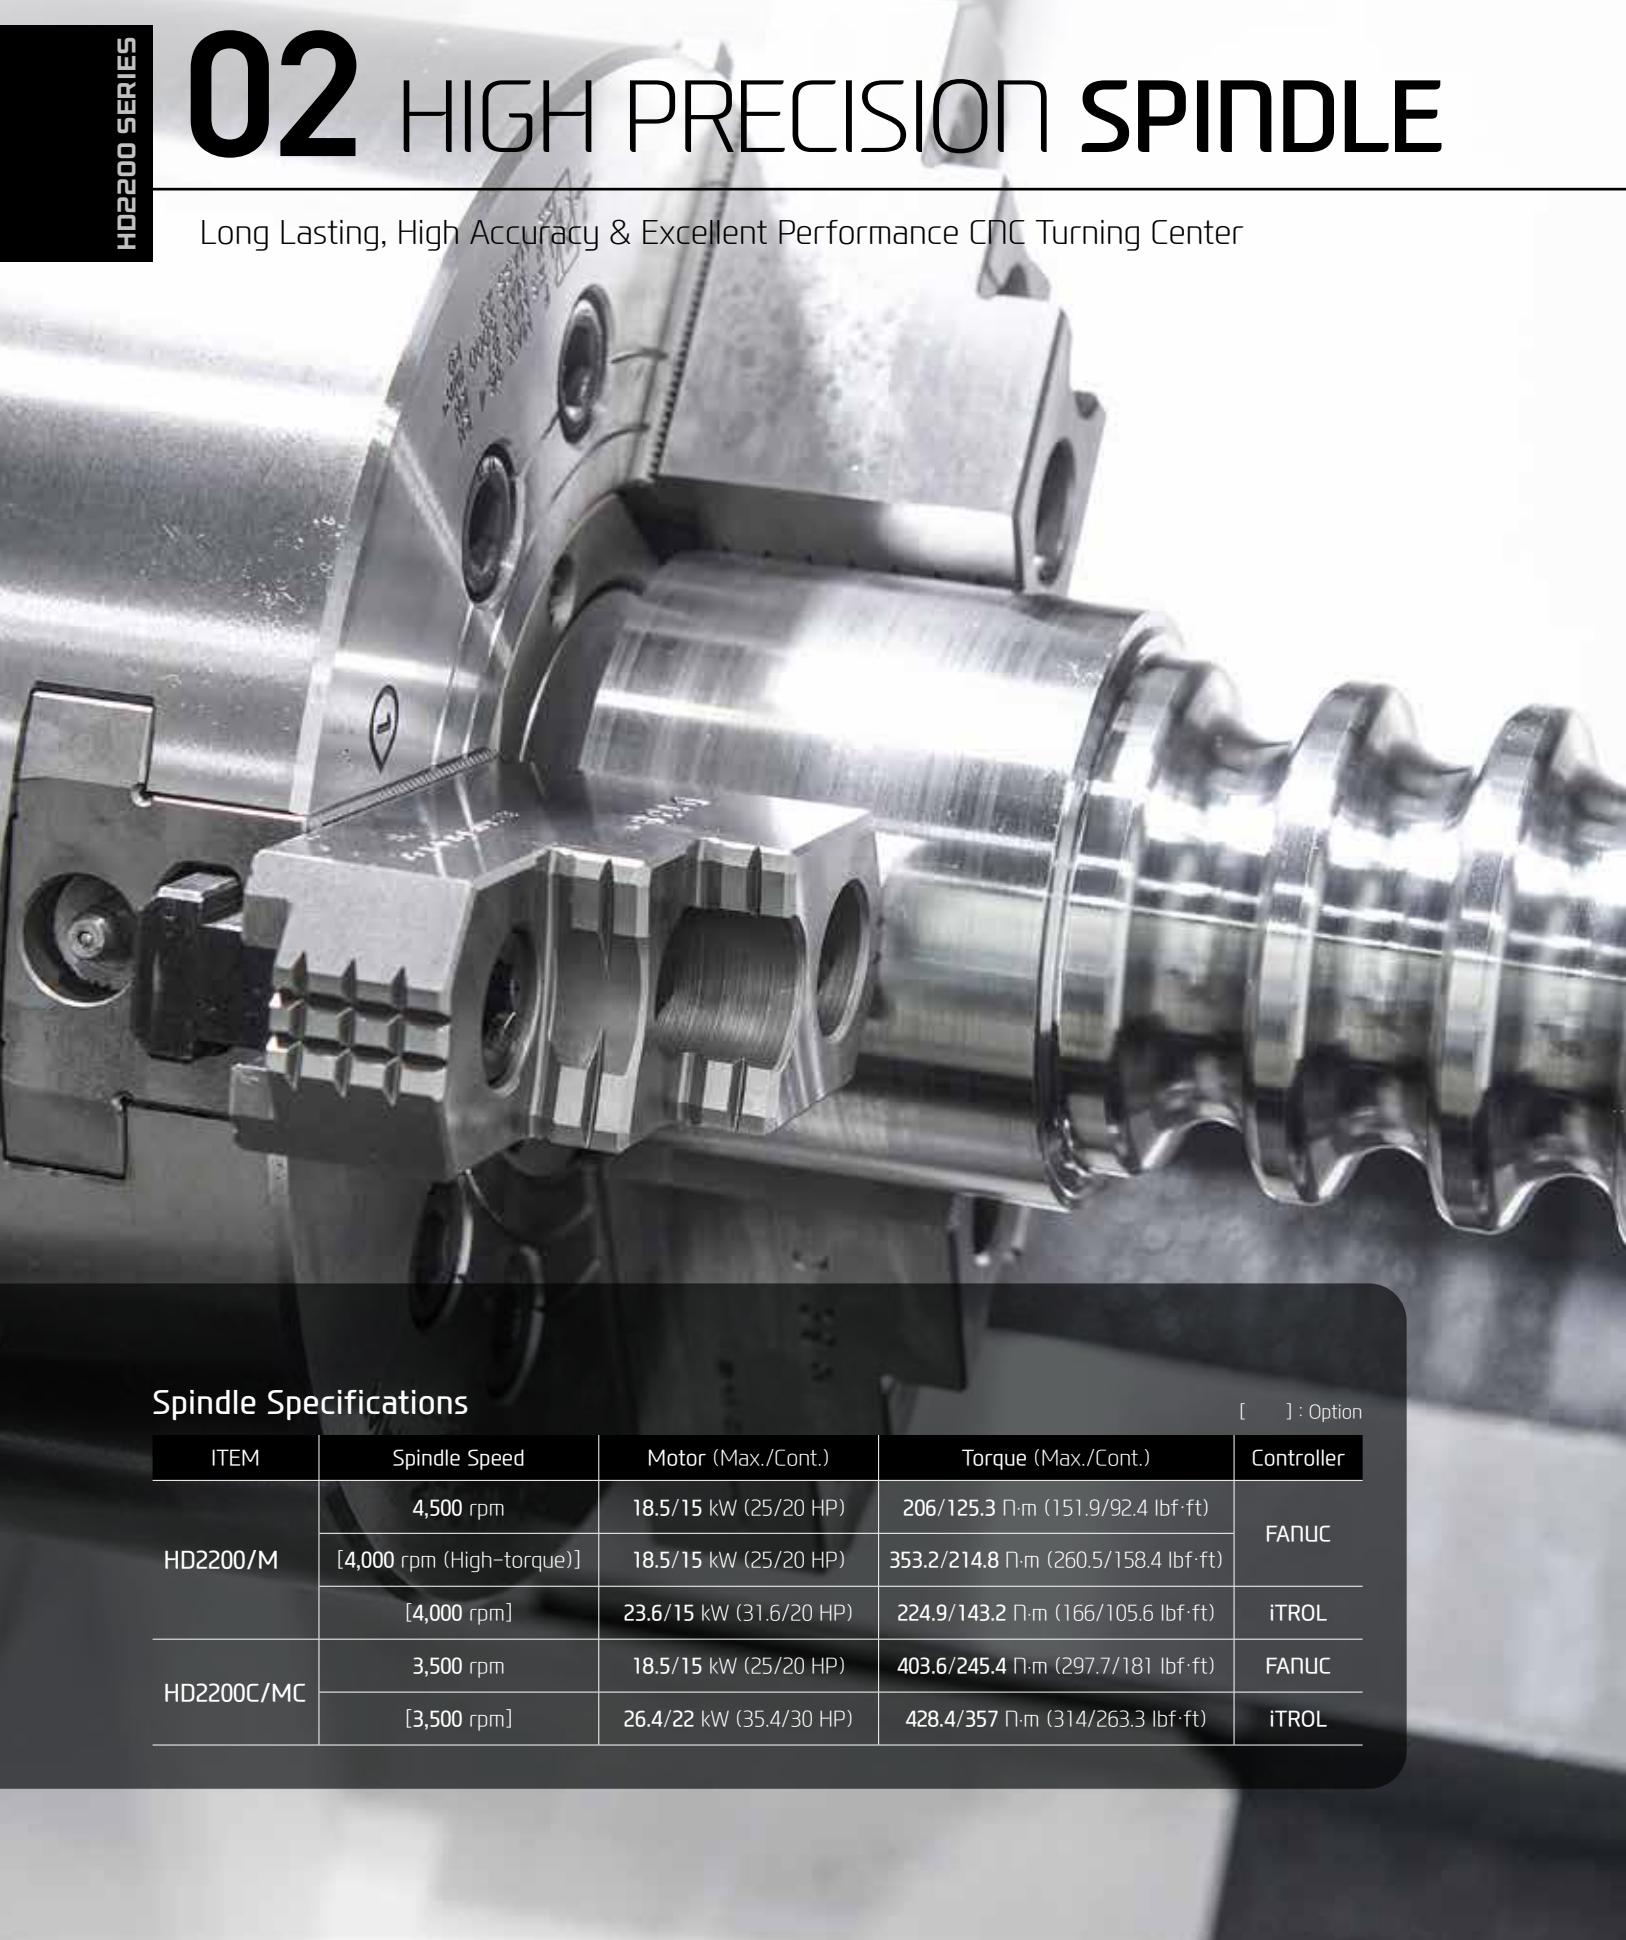

## Spindle Specifications

[ ] : Option

ITEM	Spindle Speed	Motor (Max./Cont.)	Torque (Max./Cont.)	Controller
HD2200/M	4,500 rpm	18.5/15 kW (25/20 HP)	206/125.3 N·m (151.9/92.4 lbf·ft)	FANUC
	[4,000 rpm (High-torque)]	18.5/15 kW (25/20 HP)	353.2/214.8 N·m (260.5/158.4 lbf·ft)	
	[4,000 rpm]	23.6/15 kW (31.6/20 HP)	224.9/143.2 N·m (166/105.6 lbf·ft)	iTROL
HD2200C/MC	3,500 rpm	18.5/15 kW (25/20 HP)	403.6/245.4 N·m (297.7/181 lbf·ft)	FANUC
	[3,500 rpm]	26.4/22 kW (35.4/30 HP)	428.4/357 N·m (314/263.3 lbf·ft)	iTROL


## Spindle

## HEAVY DUTY CUTTING &amp; HIGH ACCURACY

## SPINDLE

## Spindle for Heavy Cutting

The main spindle is designed with the same structure as that often found in larger sized machines. The combination of double cylindrical roller bearings and angular contact ball bearings leads to excellent heavy duty cutting performance.

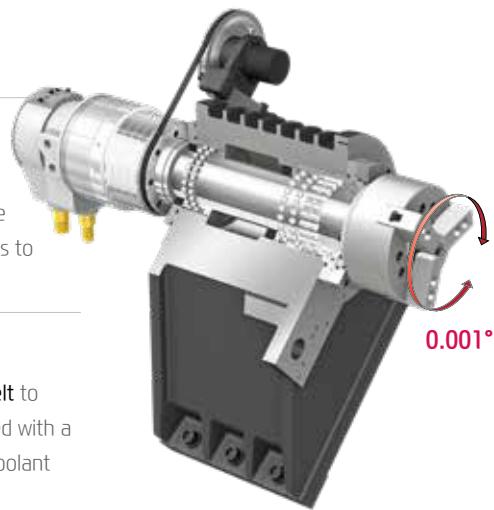

## Ribstar Belt

Also, machining performance is enhanced by applying ribstar belt to minimize noise and belt slipping problems. The spindle is designed with a **labyrinth structure** to minimize possible bearing damage from coolant and to improve machining stability.

## C-Axis Control ('M' Type)

C-axis of HD2200 Series can be controlled to 0.001° which makes it possible to process various shapes.

## TAIL STOCK

[ ] : Option

## MT#4 Tail Stock

Tailstock enables stable machining of high quality products where quill travels up to 80mm (3"). (MT#5 Tail Stock : Option)

- Quill Dia. : Ø65 (2.6") [MT#5 : Ø100 (3.9")]
- Quill Travel : 80 mm (3") [MT#5 : 120 mm (4.7")]
- Tail Stock Travel : 513.7 mm (20.2")



# 03 SERVO TURRET

High speed, High Accuracy, Highly Reliable Servo Turret



## Servo Turret

No. of Tools	Tool Size (O.D/I.D)	Indexing Time
12 EA	□ 25/Ø40 mm (□ 1"/Ø1 1/2")	0.12 sec

## Mill Turret

ITEM	Speed	Motor (Max./Cont)	Torque (Max./Cont)	Collet Size
BMT55P (FANUC)	6,000 rpm	5.5/3.7 kW (7.5/5 HP)	52.5/26.5 N·m (38.7/19.5 lbf·ft)	Ø16 (0.6")/ER25
BMT55P (iTROL)	6,000 rpm	5.3/2.8 kW (7.1/3.8 HP)	51/26.8 N·m (37.6/19.8 lbf·ft)	

# VARIOUS DRIVEN PRECISION BMT TOOL HOLDERS

## SERVO TURRET



### HD2200/C Servo Turret

The turret of HD2200 is applied with high performance AC servo motor, improving machining reliability. 3-piece coupling shows excellent performance in indexing. Powerful hydraulic tool clamping minimizes tool tip deviation caused by load.

#### Holder

To enhance rigidity, M10 bolts are used to fix holders and M12 bolts are used to fix boring bar holders.



### 20 Bar(290 psi) High Pressure Coolant **OPTION**

Turret is designed to utilize 20 bar (290 psi) high pressure coolant and it shows optimum performance in machining difficult-to-cut material.

## MILL TURRET

### HD2200M/MC BMT55P Turret (Mill Turret)

The BMT turret secures the tool with four bolts and key on the tool mounting surface of the turret, making it possible to powerfully fix the tool, ensuring high reliability in rigidity and precision.



#### Mill Tool Holder

Machining capability has increased with the addition of straight milling head tool holder, which can machine workpieces from the side, and angular milling head tool holder, which can perform I.D. operations.



#### Special Tool

#### **OPTION**

The HD2200 series can process high value-added products using a variety of rotating tools. In particular, there is a multi-holder for attaching a variety of tools to one holder, and an eccentric rotary tool for handling eccentric parts without additional axis travel, which can realize integration of process with one machine.

❖ Consultation needed when ordering these options.

# 04 USER CONVENIENCE

Various Devices for User Friendly

## BAR FEEDER SYSTEM

### Bar Feeder

Bar feeder system enables automation which leads to efficiency improvement.

Long Type : 3 m (118.1")

Short Type : 1.5 m (59.1")

Bar Capacity : Ø42 (1.7")

Bar Capacity : Ø65 (2.6")



### Parts Catcher

An optional parts catcher collects finished parts without the need to open the door, adding productivity, especially when a bar feeder is attached.



### Parts Conveyor

The parts conveyor transfers the finished workpiece unloaded by the parts catcher for user convenience.



### Auto Door

Using M-code, the doors can be automatically opened and closed which brings productivity and convenience for automation.



### Auto Shutter

Using auto shutter, automation system with gantry loader is possible without opening the machine's door.

## HIGH PRECISION SYSTEM



### Automatic Q-Setter

Cutting tools are calibrated quickly and accurately with the addition of a q-setter. Each tool tip is touched off manually using a sensor that inputs the position automatically.



### Linear Scale

Linear scales increase positioning accuracy and reduce distortion caused by thermal growth, thus ensuring a more accurate finished part.



### Work Probe


Workpiece coordinate values can be set automatically using the optional spindle probe.

Optional

## GANTRY LOADER SYSTEM

### Gantry Loader Machining Process

The high speed gantry loaders and the work stocker allow the implementation of automation cells. This enables flexible machining process and productivity enhancement. Optimization of the installation space is also possible.

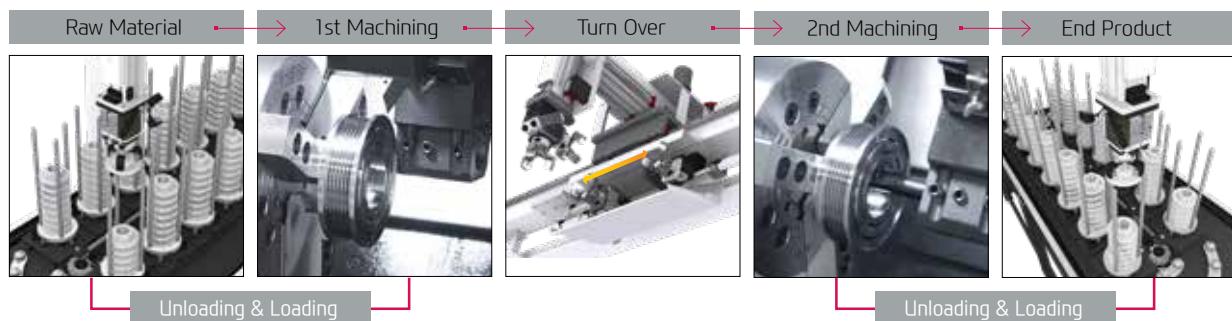

## COOLANT UNIT & ECO SYSTEM



Standard Coolant (Nozzle)

Chuck Coolant (Upper Chuck)

Chuck Air Blow (Upper Chuck)

Air Gun



MQL : Minimal Quantity Lubrication


Oil Skimmer

Mist Collector

Lubrication Device

# 05 HYUNDAI WIA FANUC – SMART PLUS

The Compatible All-round Control

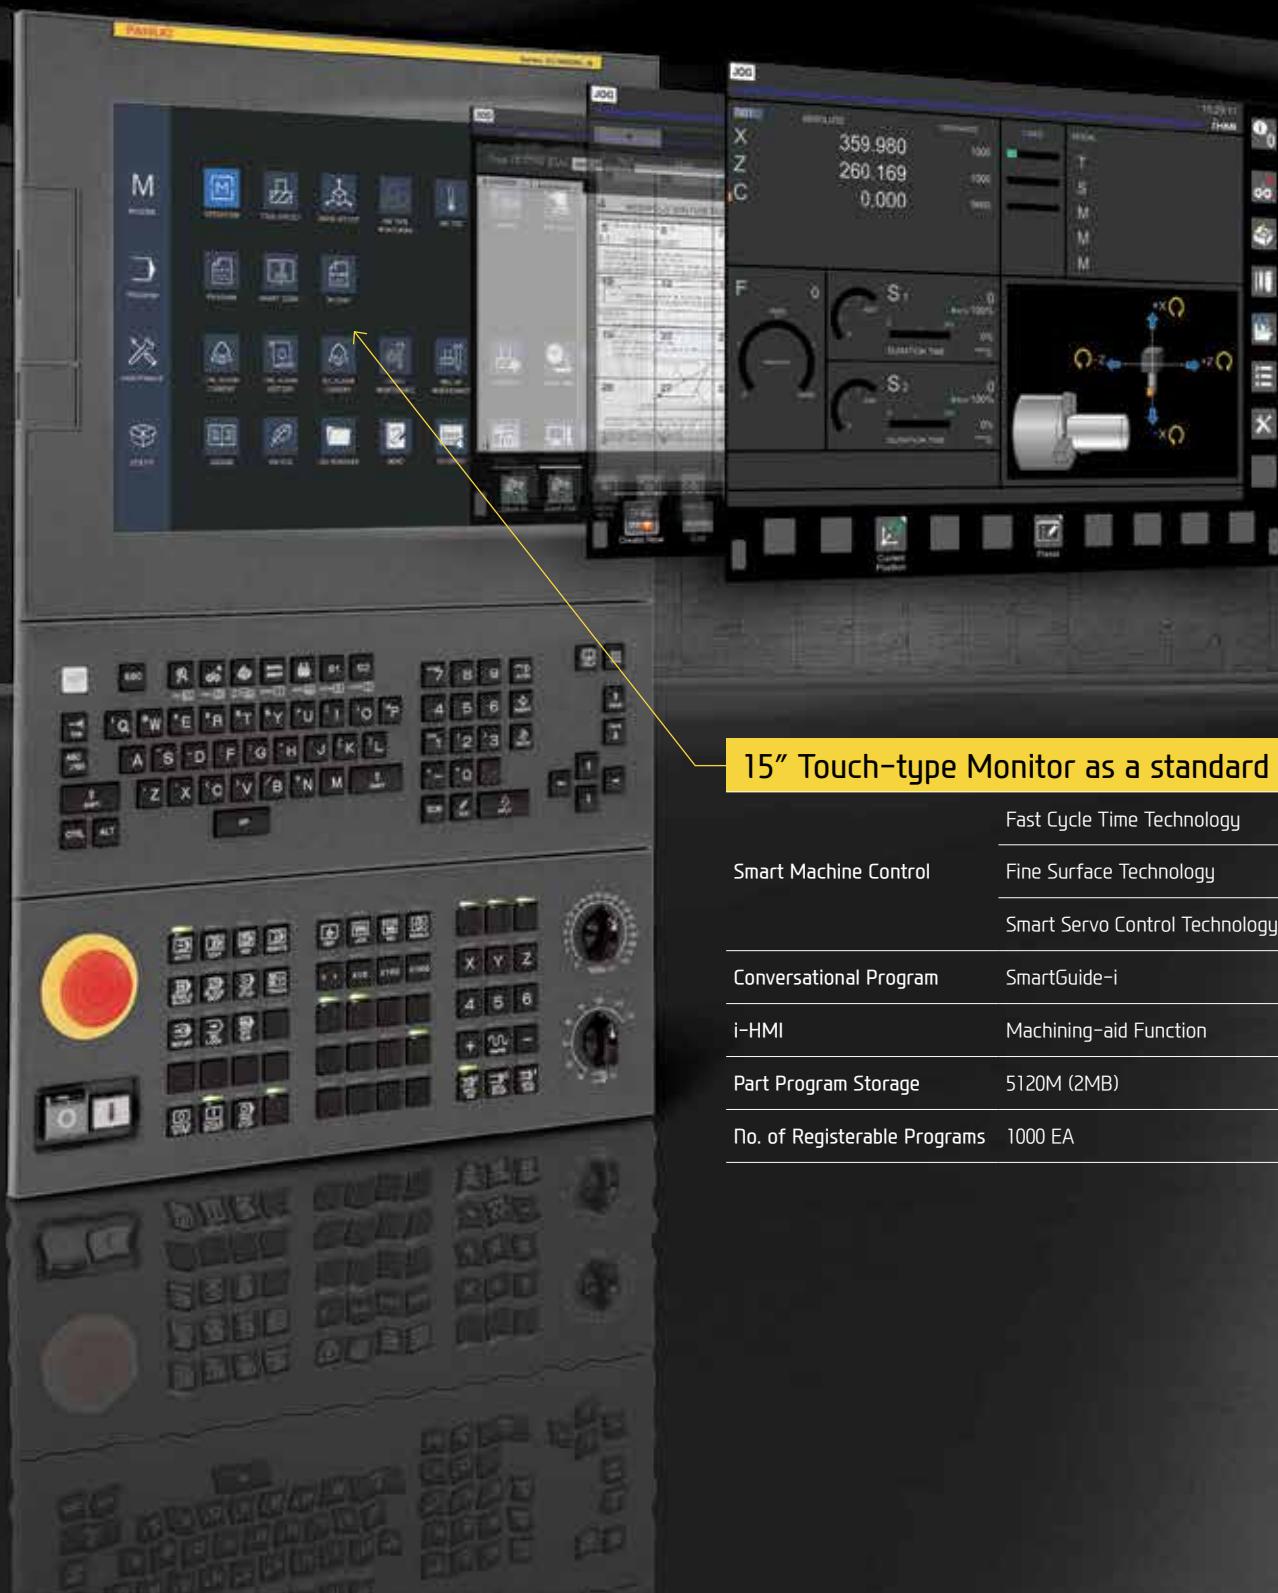

## 15" Touch-type Monitor as a standard

Smart Machine Control	Fast Cycle Time Technology
	Fine Surface Technology
	Smart Servo Control Technology
Conversational Program	SmartGuide-i
i-HMI	Machining-aid Function
Part Program Storage	5120M (2MB)
No. of Registerable Programs	1000 EA




# SMART SOFTWARE



## Dialogue Program (Smart Guide-i)

This software offers the maximum user convenience through dialogue manipulation from setup to processing. This includes writing processing programs and simulation checks.

## Convenience Function S/W

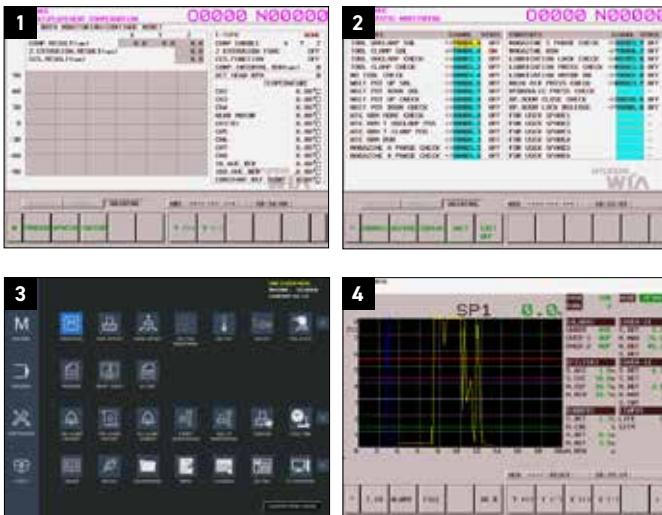

### 1. Thermal Displacement Compensation (HW-TDC) **OPTION**

This software improves processing precision by minimizing thermal deformation from changes in external environments and machining.

### 2. Machine Guidance (HW-MCG)

This software offers various user convenience functions such as tool manipulation, maintenance, tool monitoring, and a pop-up/status


### 3. LAUNCHER

This software offers shortcuts for quick access to specialized features and frequently used features.

### 4. Tool Monitoring (HW-TM) **OPTION**

This tool status monitoring software monitors and protects workpiece, tools, and equipment through real-time monitoring of the motor load from machining.

## Machining Support S/W

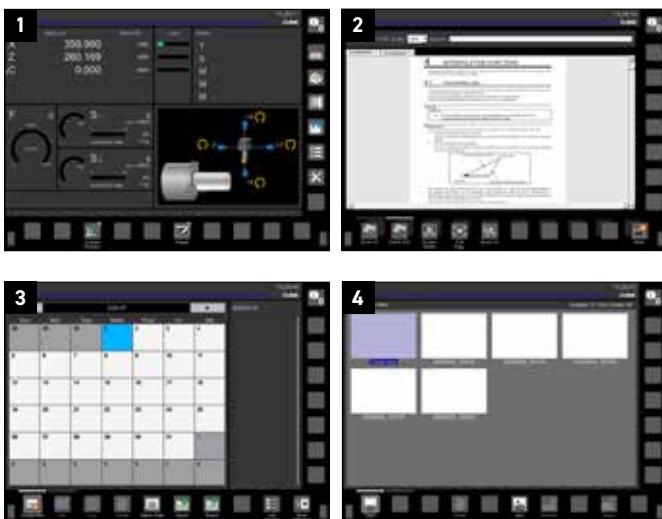

### 1. Premium Tool Operation

This software offers premium graphic functions for more intuitive tool operation. (Only in iHMI tools)

### 2. Manual Viewer

This software enables users to view electronic manuals right from the tool. (Only in iHMI tools)

### 3. Scheduling

This software enables viewing/setting up directly from the tool. This allows such actions as managing customer's tool schedules and schedule notification. (Only in iHMI tools)

### 4. Operation Memo

This software is capable of managing customer notes such as tool information and issues. (Only in iHMI tools)

# SPECIFICATIONS

## Standard & Optional

Spindle	HD2200	HD2200C
Main Spindle 8"	●	-
Hollow Chuck 3 Jaw 10"	○	●
Main Spindle 8"	-	-
Solid Chuck 3 Jaw 10"	-	-
Standard Soft Jaw (1set)	●	●
Chuck Clamp Foot Switch	●	●
2 Steps Hyd. Pressure Device	○	○
Spindle Inside Stopper	☆	☆
5° Index	☆	☆
Cs-Axis (0.001°)	-	-
Chuck Open/Close Confirmation Device	●	●
2 Steps Chuck Foot Switch	○	○
Turret		
Tool Holder	●	●
Mill Turret BMT	-	-
Straight Milling Head (Axial) Collet Type, tea	-	-
Angular Milling Head (Radial) Collet Type, tea	-	-
Straight Milling Head (Axial) Adapter Type	-	-
Angular Milling Head (Radial) Adapter Type	-	-
Boring Sleeve	●	●
Drill Socket	●	●
U-Drill Holder	○	○
U-Drill Holder Sleeve	○	○
O.D Extension Holder For Out-Dia	○	●
Angle Head	-	-
Tail Stock & Steady Rest		
Quill Type Tail Stock MT#4 (Ø65(Ø2.6))	●	●
Quill Type Tail Stock MT#4 (Ø80(Ø3.1))	○	○
Quill Type Tail Stock MT#5 (Ø100(Ø3.9))	○	○
Programable Tail Stock MT#4 (Ø65(Ø2.6))	○	○
Programable Tail Stock MT#4 (Ø80(Ø3.1))	○	○
Built-in Tail Stock MT#4 (Ø100(Ø3.9))	○	○
Manual Type Hyd. Steady Rest	-	-
Standard Live Center (Tail Stock : Standard)	●	●
High Precession Live Center	-	-
2 Steps Tail Stock Pressure System	☆	☆
Quill Forward/Reverse Confirmation Device	○	○
Tail Stock Foot Switch	☆	☆
Coolant & Air Blow		
Standard Coolant (Nozzle)	●	●
Chuck Coolant (Upper Chuck)	○	○
Gun Coolant	○	○
Through Spindle Coolant (Only for Special Chuck)	☆	☆
Chuck Air Blow (Upper Chuck)	○	○
Tail Stock Air Blow (Upper Tail Stock)	○	○
Turret Air Blow	☆	☆
Air Gun	○	○
Through Spindle Air Blow (Only for Special Chuck)	-	-
High Pressure Coolant 0.5Bar	●	●
High Pressure Coolant 6Bar	○	○
High Pressure Coolant 20Bar	○	○
Power Coolant System (For Automation)	☆	☆
Coolant Chiller (Only for Sub Tank, Chip Conveyor)	-	-
Chip Disposal		
Coolant Tank 150 l (39.6gal)(Side)	●	●
Coolant Tank 180 l (47.6gal)(Side)	● (Only for High Pressure Coolant 20 bar)	
Coolant Tank 210 l (55.5gal)(Rear)	○	○
Chip Conveyor (Hinge/Scraper/Screw) Front (Right)	○	○
Chip Conveyor (Hinge/Scraper/Screw) Rear (Rear)	○	○
Special Chip Conveyor (Drum Filter)	-	-
Chip Wagon Standard (180 l [47.5 gal])	○	○
Chip Wagon Swing (200 l [52.8 gal])	○	○
Chip Wagon Large Swing (290 l [76.6 gal])	○	○
Chip Wagon Large Size (330 l [87.2 gal])	○	○
Chip Wagon Customized	☆	☆

● : Standard ○ : Option ☆ : Prior Consultation - : Non Applicable

Safety Device	HD2200	HD2200C
Total Splash Guard	●	●
Back Spin Torque Limiter (BST)	●	●
Chuck Hydraulic Pressure Maintenance Interlock	☆	☆
Electric Device		
Call Light 1Color : ■	●	●
Call Light & Buzzer 3Color : ■ ■ ■ B	○	○
Electric Cabinet Light	○	○
Remote MPG	-	-
Work Counter Digital	○	○
Total Counter Digital	○	○
Tool Counter Digital	○	○
Multi Tool Counter Digital	○	○
Electric Circuit Breaker	○	○
AVR (Auto Voltage Regulator)	☆	☆
Transformer 25kVA	○	○
Auto Power Off	○	○
Measurement		
Manual Q-Setter	○	○
Manual Q-Setter (Renishaw)	○	○
Automatic Q-Setter (Renishaw)	○	○
Work Close Confirmation Device TACO (Only for Special Chuck)	○	○
SMC	○	○
Auto Tool Measuring Device	○	○
Linear Scale X/Z Axis	-	-
Coolant Level Sensor (Only for Chip Conveyor, bladder Type)	☆	☆
Environment		
Air Conditioner	○	○
Oil Mist Collector	☆	☆
Oil Skimmer (Only for Chip Conveyor)	○	○
MQL (Minimal Quantity Lubrication)	☆	☆
Fixture & Automation		
Auto Door	○	○
Auto Shutter (Only for Automatic System)	○	○
Sub Operation Pannel	☆	☆
Bar Feeder Interface	○	○
Bar Feeder (FEDEK)	☆	☆
Workpusher (Spring type)	○	○
Extra M-Code 4ea	○	○
Automation Interface	☆	☆
I/O Extension (IN & OUT) 16 Contact	○	○
I/O Extension (IN & OUT) 32 Contact	○	○
Parts Catcher Main SP.	○	○
Turret Work Pusher (For Automation)	☆	☆
Parts Conveyor (Required Main Parts Catcher)	☆	☆
Semi Automation System	☆	☆
Hyd. Device		
Standard Hyd. Cylinder Hollow	●	●
Standard Hyd. Unit 35bar/15 l (4gal)	●	●
S/W		
DNC software (HW-eDNC)	○	○
Machine Monitoring System (HW-MMS Cloud/Edge/Remote)	○	○
Machine Monitoring System & Analysis (HW-MMS Edge Plus)	☆	☆
Automation CAM program (HW-ACAM)	○	○
Conversational program (HW-DPRO)	○	○
SmartGuide-i : FANUC	●	●
Thermal Displacement Compensation (HW-TDC)	○	○
Tool Monitoring (HW-TM) : FANUC	○	○
Machine Guidance (HW-MCG) : FANUC	●	●
Energy Saving System (HW-ESS) : FANUC	●	●
Premium Tool Operation : FANUC	●	●
Manual Viewer : FANUC	●	●
Scheduling : FANUC	●	●
Operation Memo : FANUC	●	●
ETC		
Tool Box	●	●
Customized Color Need Munsell No.	☆	☆
CAD & CAM	☆	☆

\* 4 channel of TDC (Thermal Displacement Compensation) device is recommended, when more than 6 bar of high pressure coolant is applied, for the high quality machining.  
Specifications are subject to change without notice for improvement.

# SPECIFICATIONS

## Standard & Optional

Spindle	HD2200M	HD2200MC
Main Spindle	8"	●
Hollow Chuck 3 Jaw	10"	○
Main Spindle	8"	-
Solid Chuck 3 Jaw	10"	-
Standard Soft Jaw (1set)	●	●
Chuck Clamp Foot Switch	●	●
2 Steps Hyd. Pressure Device	○	○
Spindle Inside Stopper	☆	☆
5° Index	☆	☆
Cs-Axis (0.001")	●	●
Chuck Open/Close Confirmation Device	●	●
2 Steps Chuck Foot Switch	○	○
<b>Turret</b>		
Tool Holder	●	●
Mill Turret	BMT	●
Straight Milling Head (Axial)	Collet Type, lea	●
Angular Milling Head (Radial)	Collet Type, lea	●
Straight Milling Head (Axial)	Adapter Type	○
Angular Milling Head (Radial)	Adapter Type	○
Boring Sleeve	●	●
Drill Socket	○	○
U-Drill Holder	●	●
U-Drill Holder Sleeve	●	●
O.D Extension Holder	For Out-Dia	-
Angle Head	☆	☆
<b>Tail Stock &amp; Steady Rest</b>		
Quill Type Tail Stock	MT#4 (Ø65(Ø2.6))	●
	MT#4 (Ø80(Ø3.1))	○
	MT#5 (Ø100(Ø3.9))	○
Programable Tail Stock	MT#4 (Ø65(Ø2.6))	○
	MT#4 (Ø80(Ø3.1))	○
Built-in Tail Stock	MT#4 (Ø100(Ø3.9))	○
Standard Live Center (Tail Stock : Standard)	●	●
High Precision Live Center	-	-
2 Steps Tail Stock Pressure System	☆	☆
Quill Forward/Reverse Confirmation Device	○	○
Tail Stock Foot Switch	☆	☆
<b>Coolant &amp; Air Blow</b>		
Standard Coolant (Nozzle)	●	●
Chuck Coolant (Upper Chuck)	○	○
Gun Coolant	○	○
Through Spindle Coolant (Only for Special Chuck)	☆	☆
Thru Coolant for Live Tool	○	○
Chuck Air Blow (Upper Chuck)	○	○
Tail Stock Air Blow (Upper Tail Stock)	○	○
Turret Air Blow	☆	☆
Air Gun	○	○
Through Spindle Air Blow (Only for Special Chuck)	-	-
High Pressure Coolant	0.5Bar	●
	6Bar	○
	20Bar	○
Power Coolant System (For Automation)	☆	☆
Coolant Chiller (Only for Sub Tank, Chip Conveyor)	-	-
<b>Chip Disposal</b>		
Coolant Tank	150 l (39.6gal)(Side)	●
	180 l (47.6gal)(Side)	● (Only for High Pressure Coolant 20 bar)
	210 l (55.5gal)(Rear)	○
Chip Conveyor (Hinge/Scraper/Screw)	Front (Right)	○
	Rear (Rear)	○
Special Chip Conveyor (Drum Filter)	-	-
Chip Wagon	Standard (180 l [47.5 gal])	○
	Swing (200 l [52.8 gal])	○
	Large Swing (290 l [76.6 gal])	○
	Large Size (330 l [87.2 gal])	○
	Customized	☆


● : Standard ○ : Option ☆ : Prior Consultation - : Non Applicable

Safety Device	HD2200M	HD2200MC
Total Splash Guard	●	●
Back Spin Torque Limiter (BST)	●	●
Chuck Hydraulic Pressure Maintenance Interlock	☆	☆
<b>Electric Device</b>		
Call Light	1Color : ■	●
	3Color : ■ ■ ■	○
Electric Cabinet Light		○
Remote MPG	-	-
Work Counter	Digital	○
Total Counter	Digital	○
Tool Counter	Digital	○
Multi Tool Counter	Digital	○
Electric Circuit Breaker		○
AVR (Auto Voltage Regulator)		☆
Transformer	25kVA	○
Auto Power Off		○
<b>Measurement</b>		
Manual Q-Setter		○
Manual Q-Setter (Renishaw)		○
Automatic Q-Setter (Renishaw)		○
Work Close Confirmation Device (Only for Special Chuck)	TACO SMC	○
Auto Tool Measuring Device		○
Linear Scale	X/Z Axis	-
Coolant Level Sensor (Only for Chip Conveyor, bladder Type)		☆
<b>Environment</b>		
Air Conditioner		○
Oil Mist Collector		☆
Oil Skimmer (Only for Chip Conveyor)		○
MQL (Minimal Quantity Lubrication)		☆
<b>Fixture &amp; Automation</b>		
Auto Door		○
Auto Shutter (Only for Automatic System)		○
Sub Operation Pannel		☆
Bar Feeder Interface		○
Bar Feeder (FEDEK)		☆
workpusher (Spring type)		○
Extra M-Code 4ea		○
Automation Interface		☆
I/O Extension (IN & OUT)	16 Contact	○
	32 Contact	○
Parts Catcher		○
Turret Work Pusher (For Automation)		☆
Parts Conveyor (Required Main Parts Catcher)		☆
Semi Automation System		☆
<b>Hyd. Device</b>		
Standard Hyd. Cylinder	Hollow	●
Standard Hyd. Unit	35bar/15 l (4gal)	●
<b>S/W</b>		
DNC software (HW-eDNC)		○
Machine Monitoring System (HW-MMS Cloud/Edge/Remote)		○
Machine Monitoring System & Analysis (HW-MMS Edge Plus)		☆
Automation CAM program (HW-ACAM)		-
Conversational program (HW-DPRO)		○
SmartGuide-i : FANUC		●
Thermal Displacement Compensation (HW-TDC)		○
Tool Monitoring (HW-TM) : FANUC		○
Machine Guidance (HW-MCG) : FANUC		●
Energy Saving System (HW-ESS) : FANUC		●
Premium Tool Operation : FANUC		●
Manual Viewer : FANUC		●
Scheduling : FANUC		●
Operation Memo : FANUC		●
<b>ETC</b>		
Tool Box		●
Customized Color	Need Munsel No.	☆
CAD & CAM		☆

\* 4 channel of TDC(Thermal Displacement Compensation) device is recommended, when more than 6 bar of high pressure coolant is applied, for the high quality machining.  
Specifications are subject to change without notice for improvement.

# SPECIFICATIONS


## Spindle Output/Torque Diagram (FANUC)

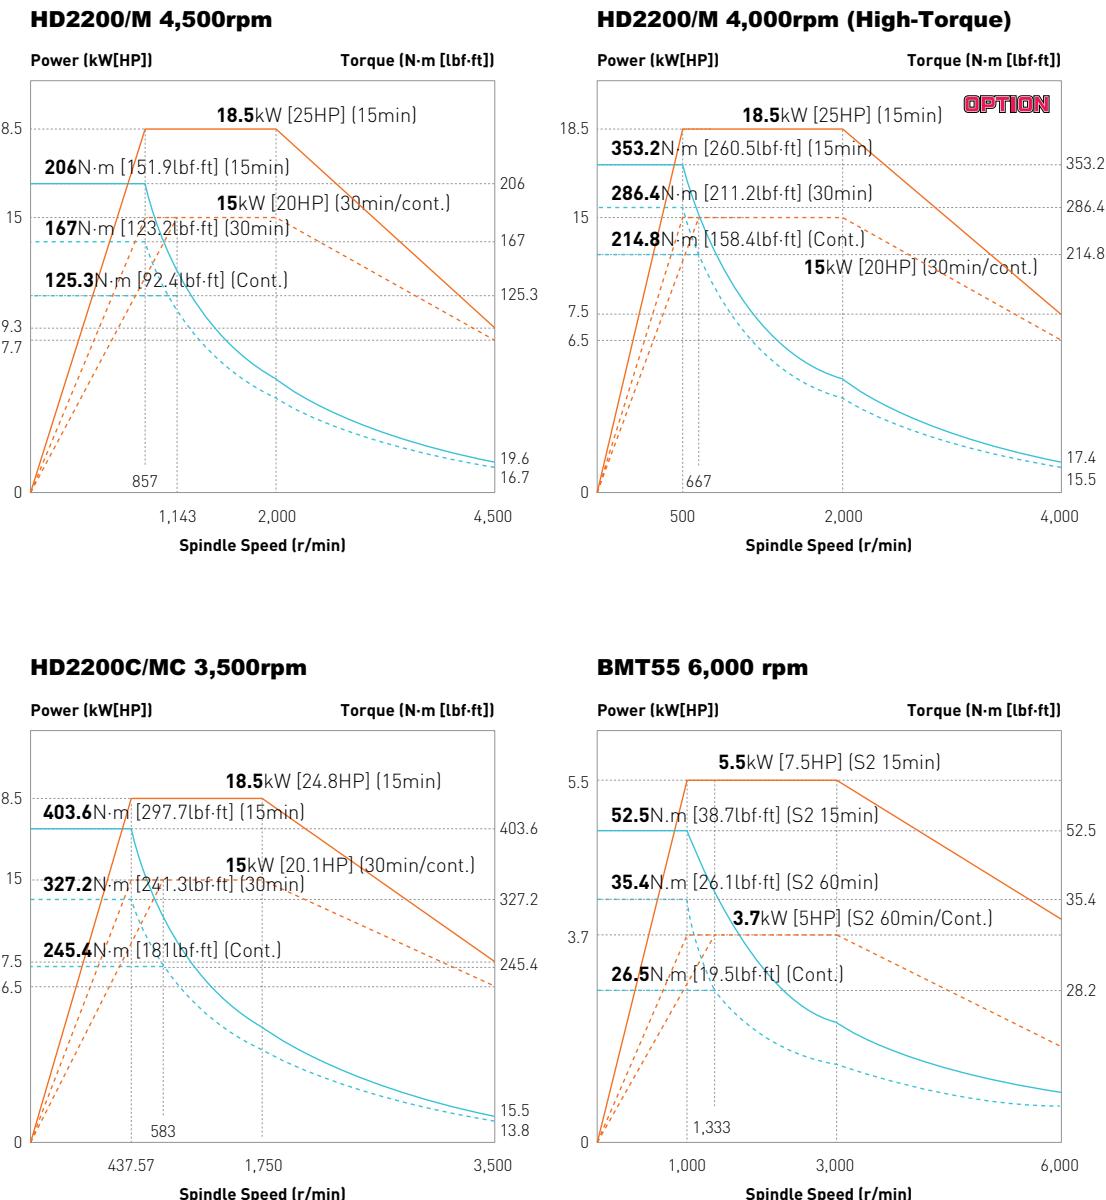


# SPECIFICATIONS

## Spindle Output/Torque Diagram (HYUNDAI-iTROL)


**HD2200/M 4,000rpm (iTROL)**

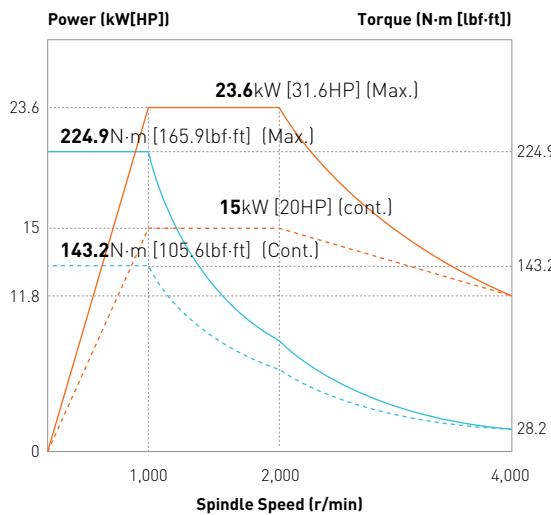

**HD2200C/MC 3,500rpm (iTROL)**

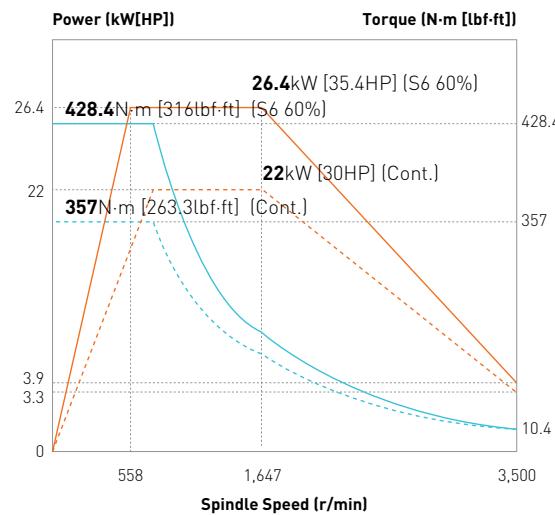

**BMT55 6,000 rpm (iTROL)**

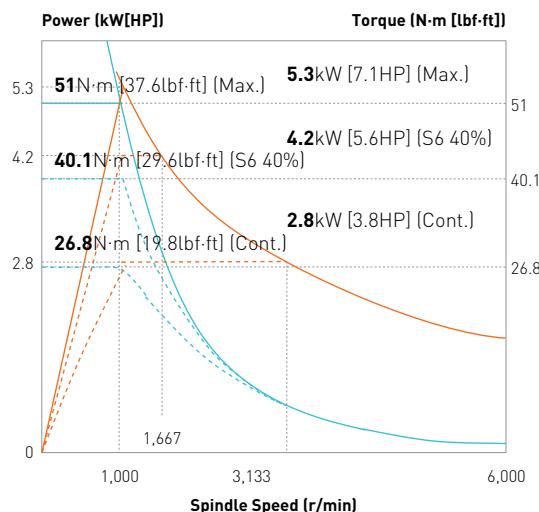


# SPECIFICATIONS

## External Dimensions

unit : mm(in)

**HD2200/M  
HD2200C/MC**

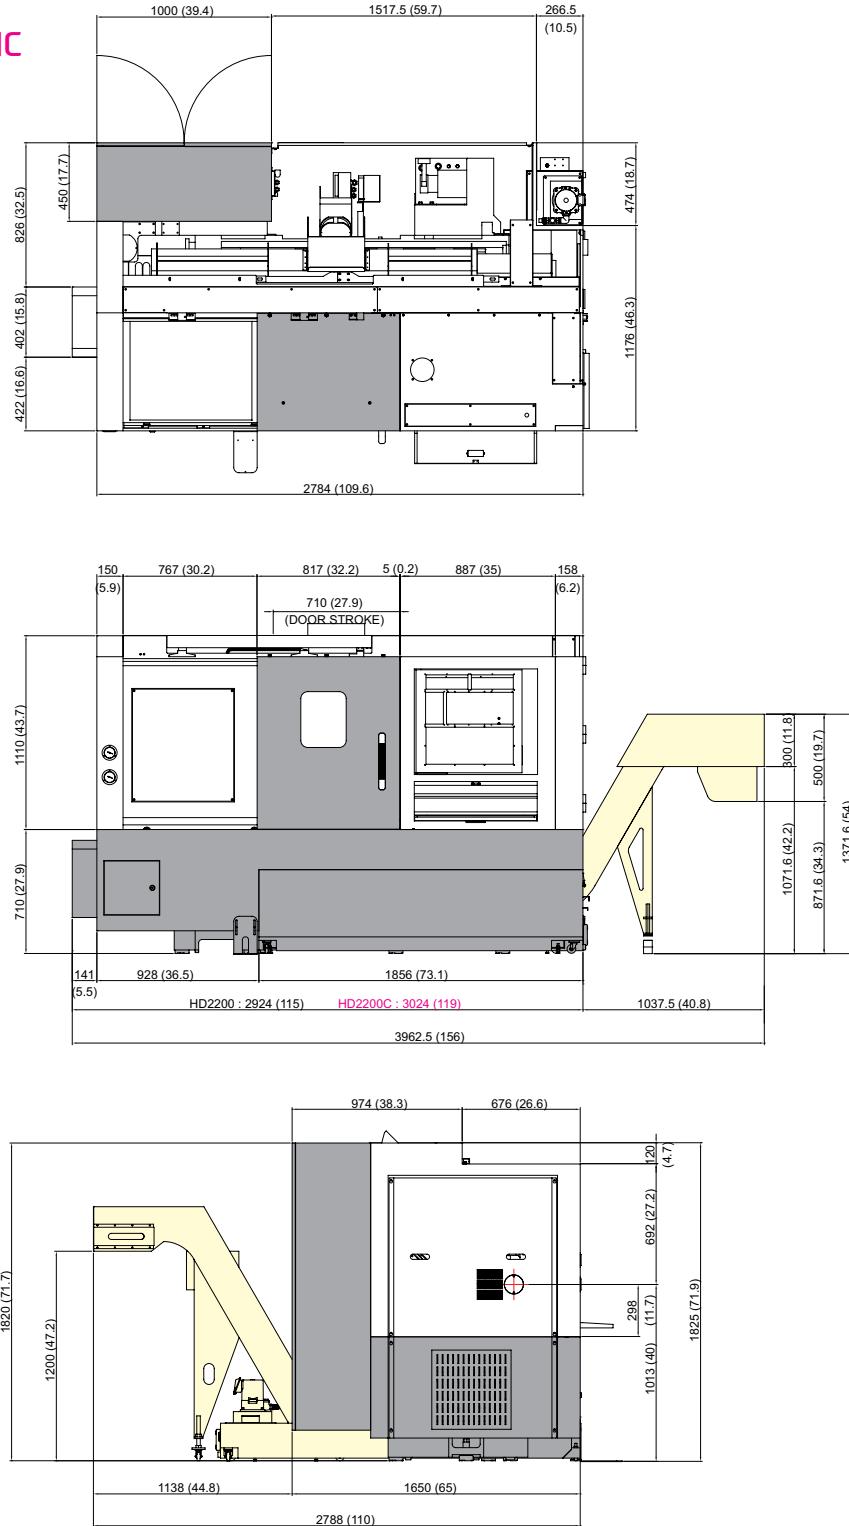


# SPECIFICATIONS

## Tooling System

unit : mm(in)

### HD2200 | HD2200C

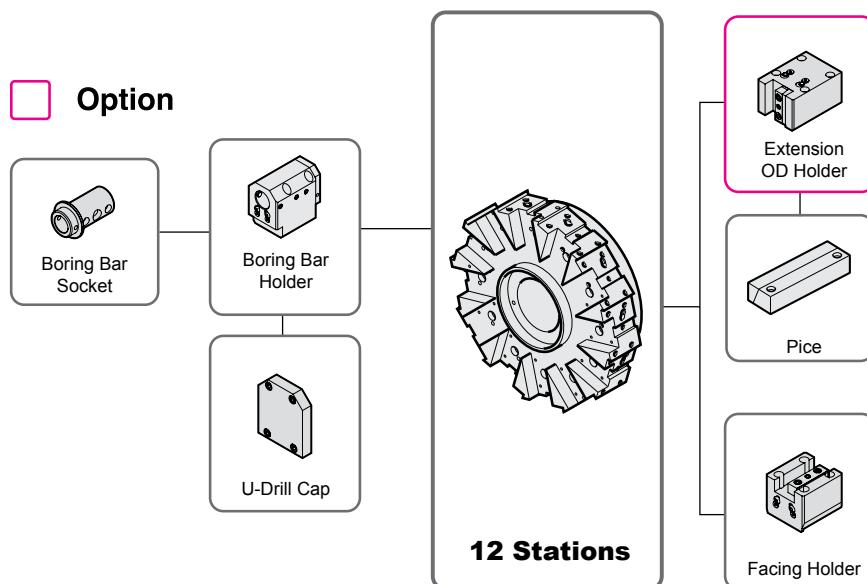

## Tooling Parts Detail

ITEM			HD2200		HD2200C	
			mm Unit	inch Unit	mm Unit	inch Unit
Turning Holder	O.D Holder	Extention (40mm)	Opt.	Opt.	1	1
	Facing Holder		1	1	1	1
Boring Holder	I.D Holder	Single ( $\varnothing 40$ , $\varnothing 1 1/2"$ )	5	5	4	4
	U-Drill Holder	Cap	1	1	1	1
Driven Holder	Straight Mill Holder	Standard	-	-	-	-
		TTC	-	-	-	-
	Angular Mill Holder	Standard	-	-	-	-
		TTC	-	-	-	-
Socket	Boring	$\varnothing 10$ ( $3/8"$ )	1	-	1	-
		$\varnothing 12$ ( $1/2"$ )	1	1	1	1
		$\varnothing 16$ ( $5/8"$ )	1	-	1	-
		$\varnothing 20$ ( $3/4"$ )	1	1	1	1
		$\varnothing 25$ ( $1"$ )	1	1	1	1
		$\varnothing 32$ ( $1 1/4"$ )	1	1	1	1
	Drill	MT 1 × MT 2	1	1	1	1
		MT 2	1	1	1	1
	ER Collet		-	-	-	-


Specifications are subject to change without notice for improvement.

# SPECIFICATIONS

## Tooling System

unit : mm(in)

### HD2200M/MC

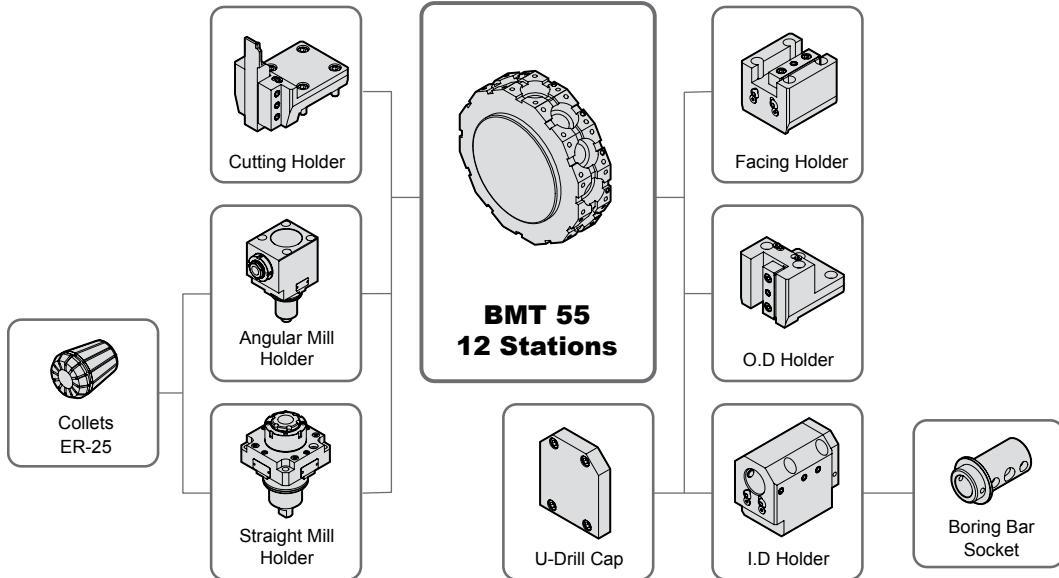

## Tooling Parts Detail


ITEM			HD2200M		HD2200MC	
			mm Unit	inch Unit	mm Unit	inch Unit
Turning Holder	O.D Holder	Right/Left	4	4	4	4
	Cutting Holder		1	1	1	1
	Facing Holder		1	1	1	1
Boring Holder	I.D Holder	Single (Ø40, Ø1 1/2")	4	4	4	4
	U-Drill Holder	Cap	1	1	1	1
Driven Holder	Straight Mill Holder	Standard	1	1	1	1
		TTC	Opt.	Opt.	Opt.	Opt.
	Angular Mill Holder	Standard	1	1	1	1
		TTC	Opt.	Opt.	Opt.	Opt.
Socket	Boring	Ø10 (Ø3/8")	1	1	1	1
		Ø12 (Ø1/2")	1	1	1	1
		Ø16 (Ø5/8")	1	1	1	1
		Ø20 (Ø3/4")	1	1	1	1
		Ø25 (Ø1")	1	1	1	1
		Ø32 (Ø1 1/4")	1	1	1	1
	Drill	MT 1 x MT 2	Opt.	Opt.	Opt.	Opt.
		MT 2	Opt.	Opt.	Opt.	Opt.
		MT 3	Opt.	Opt.	Opt.	Opt.
	ER Collet		1 Set	1 Set	1 Set	1 Set

# SPECIFICATIONS


## Interference

unit : mm(in)


**HD2200**

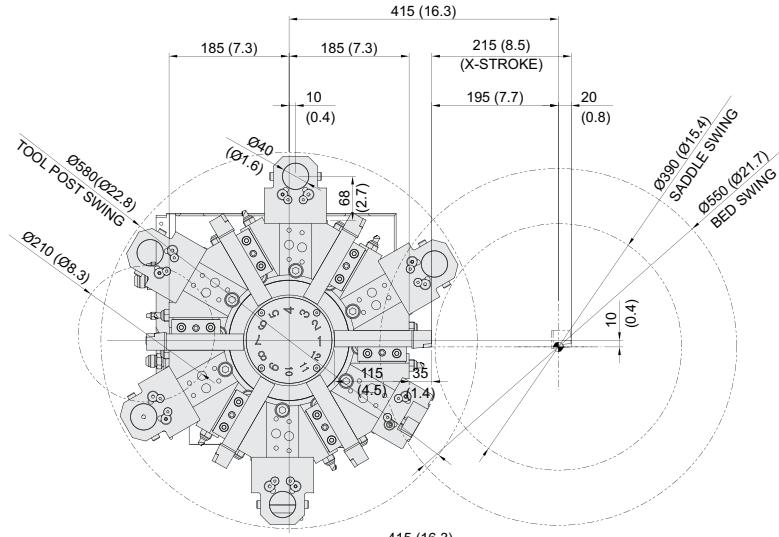

**HD2200C**

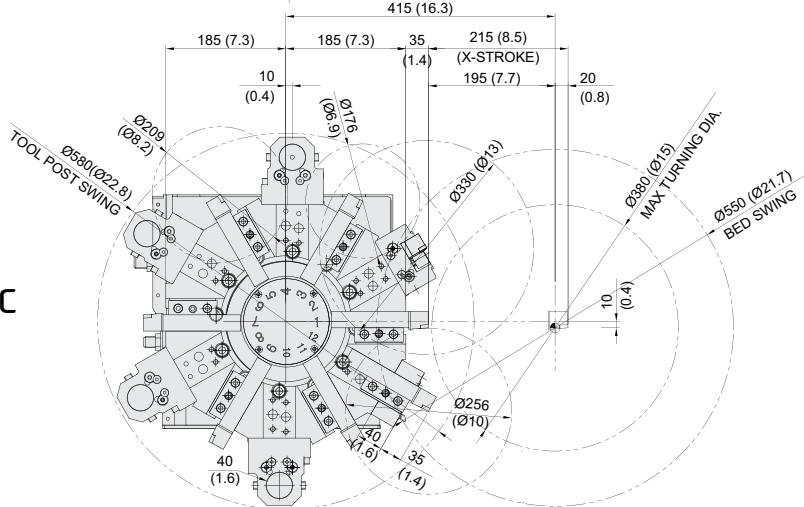

**HD2200M  
HD2200MC**

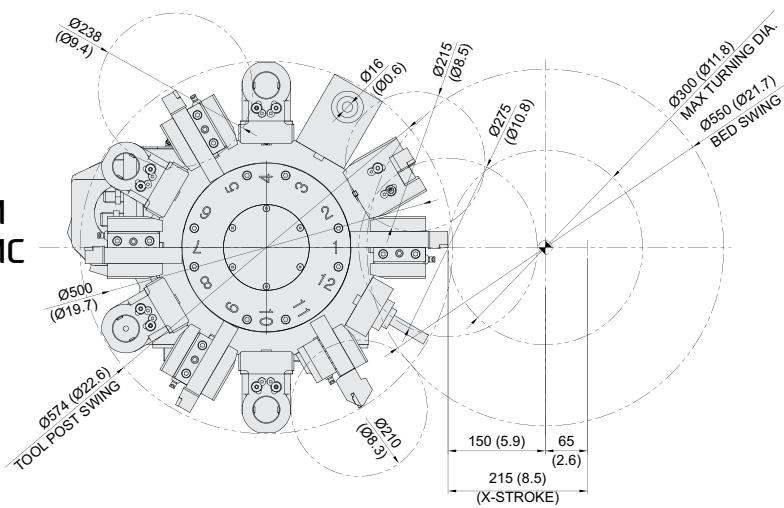

If the tool is placed differently from the picture above, it may interfere with the chuck when applying the O.D Extension holder.


# SPECIFICATIONS

## Tooling Travel Range


unit : mm(in)

HD2200

### O.D Tool Holder

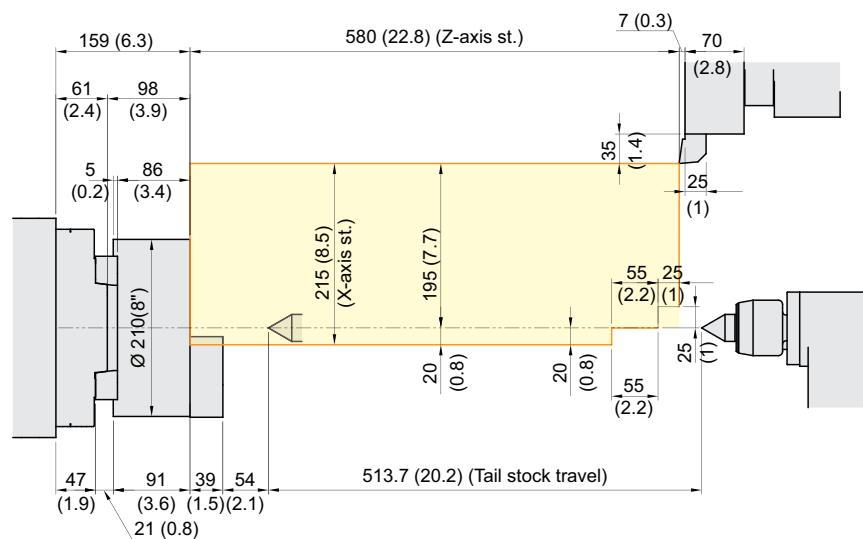

### I.D Tool Holder

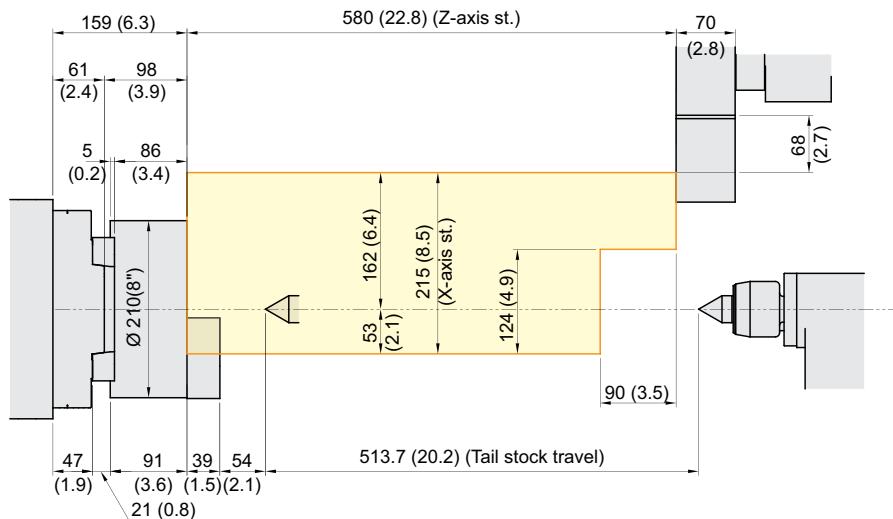


# SPECIFICATIONS

## Tooling Travel Range


unit : mm(in)

### HD2200C

#### O.D Tool Holder

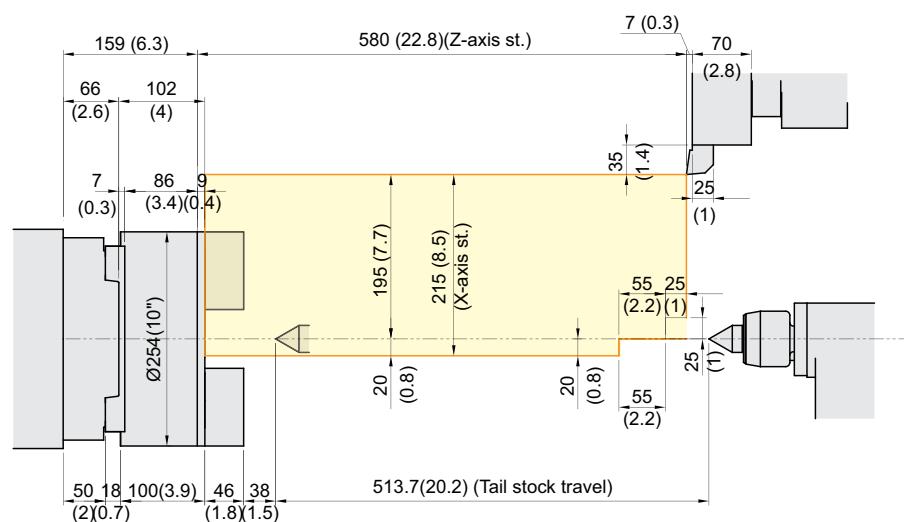

#### I.D Tool Holder

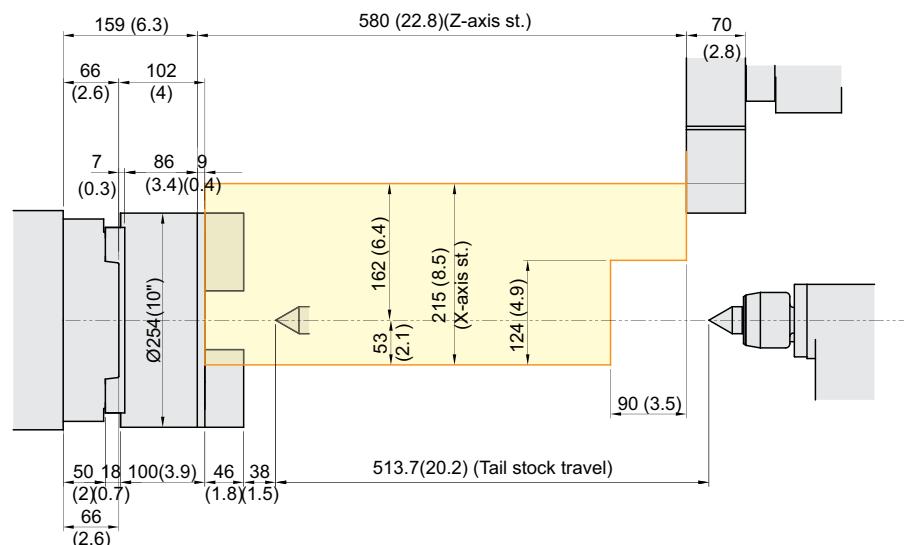


# SPECIFICATIONS

## Tooling Travel Range


unit : mm(in)

HD2200M

### O.D. Tool holder

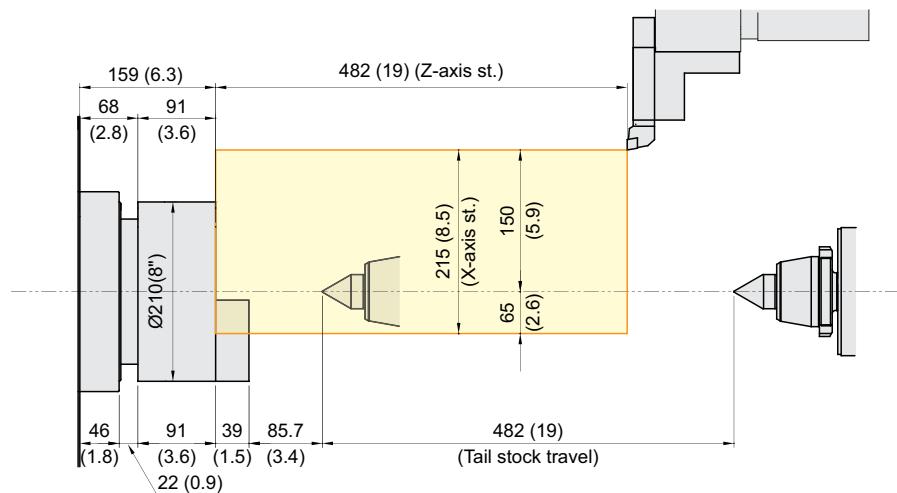

### I.D. Tool holder

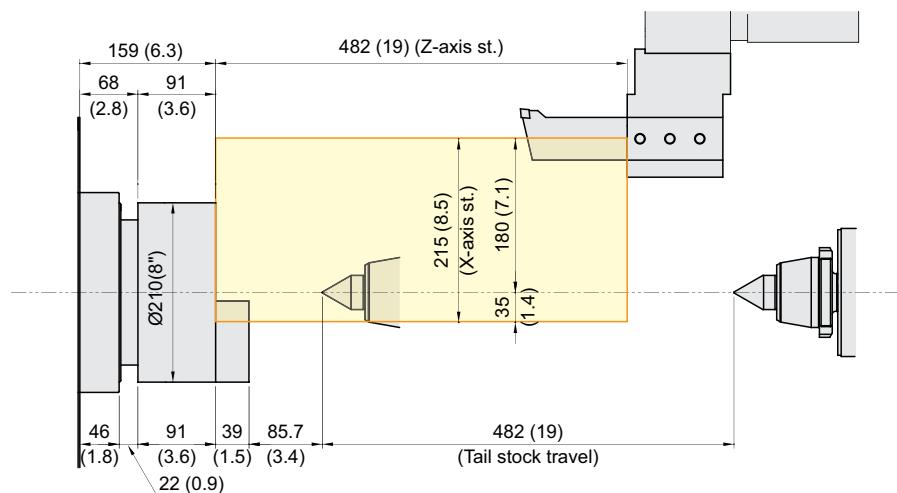


# SPECIFICATIONS

## Tooling Travel Range


unit : mm(in)

**HD2200M**


### Straight Mill Holder

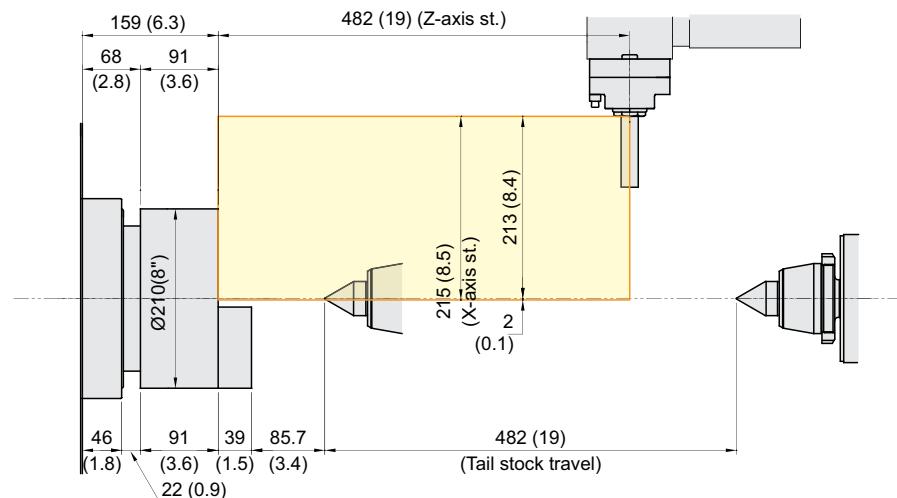

### Angular Mill Holder

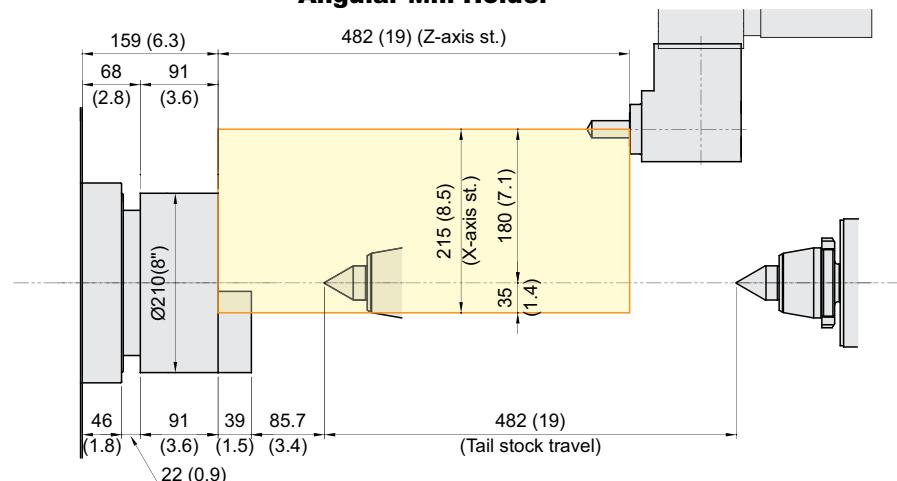

### Face Tool holder

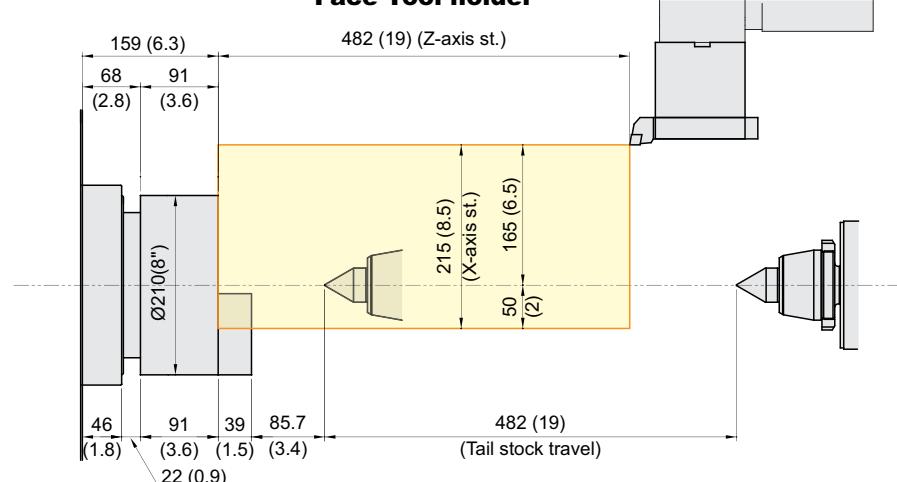


# SPECIFICATIONS

## Tooling Travel Range


unit : mm(in)

HD2200MC

### O.D. Tool holder

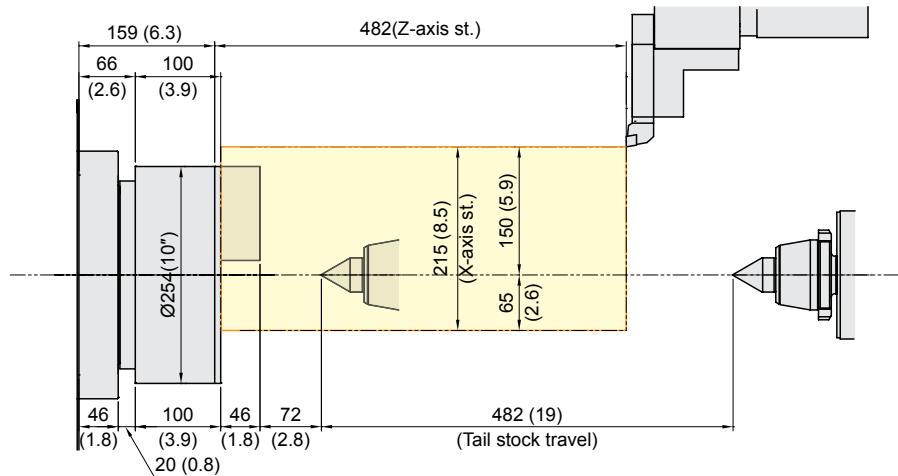

### I.D. Tool holder

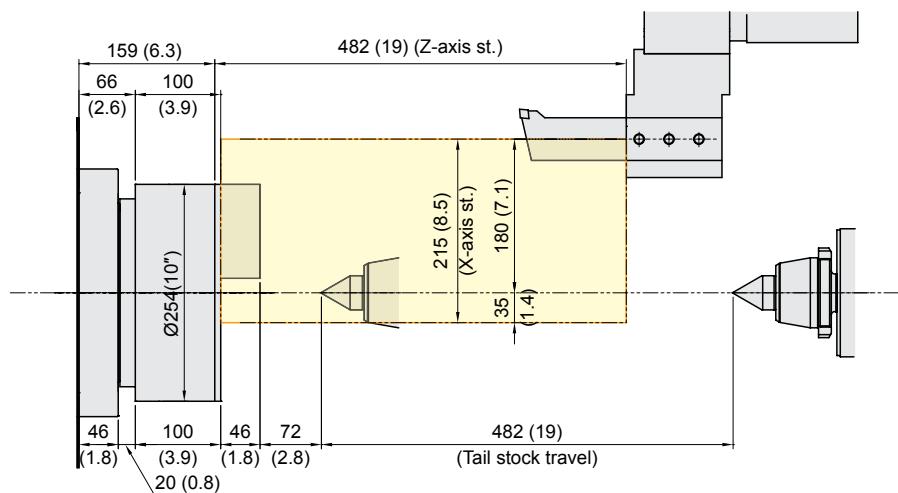


# SPECIFICATIONS

Tooling Travel Range


unit : mm(in)

## HD2200MC


### Straight Mill Holder

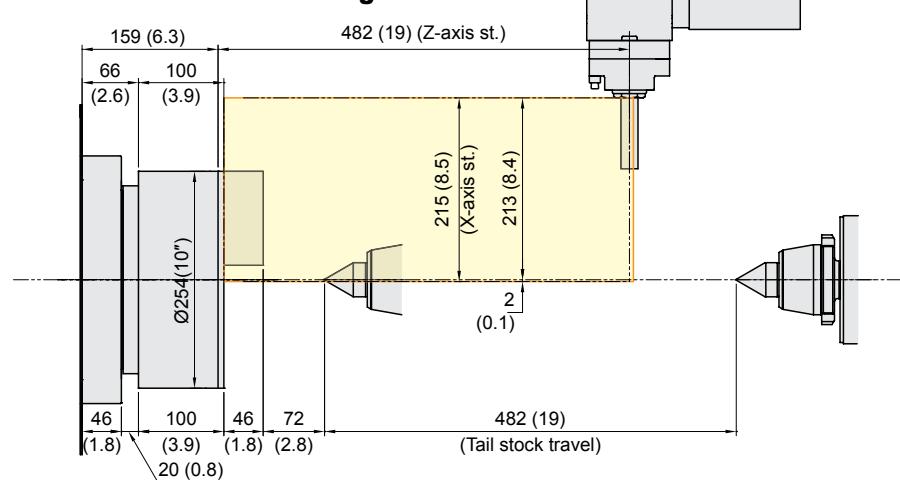

### Angular Mill Holder

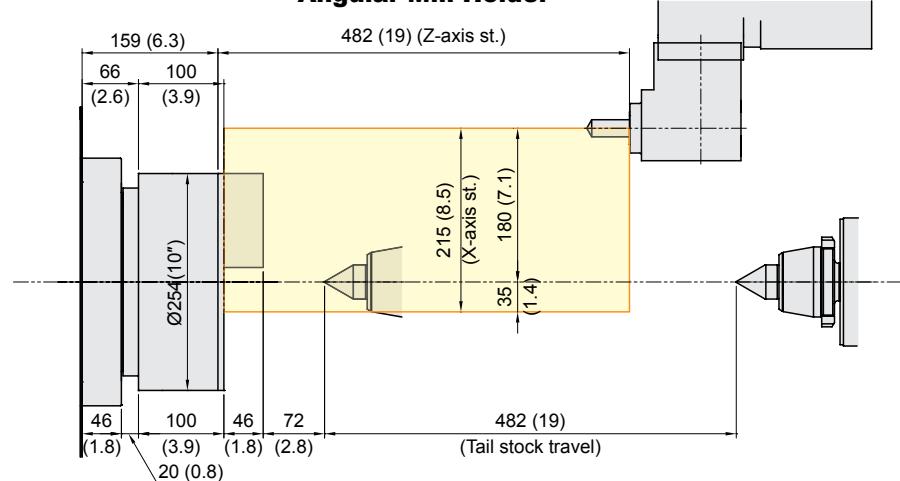

### Face Tool holder

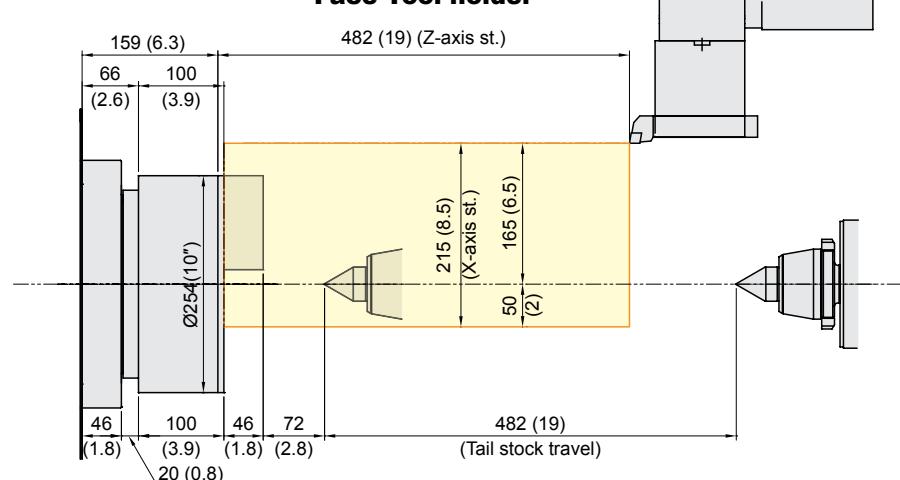

# SPECIFICATIONS

## Specifications

[ ] : Option

ITEM		HD2200	HD2200C
CAPACITY	Swing Over the Bed	mm(in)	Ø550 (21.7")
	Swing Over the Carriage	mm(in)	Ø390 (15.4")
	Max. Turning Dia.	mm(in)	Ø380 (15")
	Max. Turning Length	mm(in)	565 (22.2")
	Bar Capacity	mm(in)	Ø65 (2.6")
SPINDLE	Chuck Size	inch	8" [10"]
	Spindle Bore	mm(in)	Ø76 (3")
	Spindle Speed (rpm)	r/min	4,500 [4,000] [4,000]
	Motor (Max/Cont.)	kW(HP)	18.5/15 (25/20) [18.5/15 (25/20)] [23.6/15 (31.6/20)]
	Torque (Max/Cont.)	N·m(lbf·ft)	206/125.3 (151.9/92.4) [353.2/214.8 (260.5/158.4)] [225/143.2 (166/105.6)]
	Spindle Type	-	BELT
	Spindle Nose	-	A2-6
	C-axis Indexing	deg	-
	Travel (X/Z/B)	mm(in)	215/580 (8.5"/22.8")
FEED	Rapid Traverse Rate (X/Z)	m/min(ipm)	24/30 (945/1,181)
	Slide Type	-	BOX GUIDE
	No. of Tools	EA	12
TURRET	Tool Size	OD	Ø25 (1")
		ID	Ø40 (1.6")
	Indexing Time	sec/step	0.12
LIVE TOOL	Motor (Max/Cont.)	kW(HP)	-
	Milling Tool Speed (rpm)	r/min	-
	Torque (Max/Cont.)	N·m(lbf·ft)	-
	Collet Size	mm(in)	-
	Type	-	-
TAIL STOCK	Taper	-	MT#4 [MT#5]
	Quill Dia.	mm(in)	Ø65 (2.6") [Ø100 (3.9")]
	Quill Travel	mm(in)	80 (3.1") [120 (4.7")]
	Travel	mm(in)	513.7 (20.2")
TANK CAPACITY	Coolant Tank	l (gal)	150 (39.6)
	Lubricating Tank	l (gal)	1.8 (0.5)
POWER SUPPLY	Electric Power Supply	kVA	23
	Thickness of Power Cable	Sq	OVER 16
	Voltage	V/Hz	220/60 (200/50*)
MACHINE	Floor Space (L×W)	mm(in)	2,925×1,650 (115.2"×65")
	Height	mm(in)	1,820 (71.7")
	Weight	kg(lb)	4,100 (9,039)
NC	Controller	-	HYUNDAI WIA FANUC - SMART PLUS [HYUNDAI-iTROL]

\*) Using 50Hz voltage instead of 60Hz may lower the output of motors. (excluding servo motors and inverter motors)

Specifications are subject to change without notice for improvement.

# SPECIFICATIONS

## Specifications

[ ] : Option

	ITEM	HD2200M	HD2200MC
CAPACITY	Swing Over the Bed	mm(in)	Ø550 (21.7")
	Swing Over the Carriage	mm(in)	Ø390 (15.4")
	Max. Turning Dia.	mm(in)	Ø300 (11.8")
	Max. Turning Length	mm(in)	467 (18.4")
	Bar Capacity	mm(in)	Ø65 (2.6")
SPINDLE	Chuck Size	inch	8" [10"]
	Spindle Bore	mm(in)	Ø76 (3")
	Spindle Speed (rpm)	r/min	4,500 [4,000] [4,000]
	Motor (Max/Cont.)	kW(hp)	18.5/15 (24.8/20.1) [18.5/15 (24.8/20.1)] [23.6/15 (31.6/20.1)]
	Torque (Max/Cont.)	N·m(lbf·ft)	206/125.3 (151.9/92.4) [353.2/214.8 (260.5/158.4)] [225/143.2 (166/105.6)]
	Spindle Type	-	BELT
	Spindle Nose	-	A2-6
	C-axis Indexing	deg	0.001°
FEED	Travel (X/Z/B)	mm(in)	215/482 (8.5"/19")
	Rapid Traverse Rate (X/Z)	m/min(ipm)	24/30 (945/1,181)
	Slide Type	-	BOX GUIDE
TURRET	No. of Tools	ea	12
	Tool Size	OD mm(in)	Ø 25 (1")
		ID mm(in)	Ø40 (1.6")
	Indexing Time	sec/step	0.2
LIVE TOOL	Motor (Max/Cont.)	kW(hp)	5.5/3.7 (7.5/5) [5.3/2.8 (7.1/3.8)]
	Milling Tool Speed (rpm)	r/min	6,000 [6,000]
	Torque (Max/Cont.)	N·m(lbf·ft)	52.5/26.5 (38.7/19.5) [51/26.8 (37.6/19.8)]
	Collet Size	mm(in)	Ø16 (0.6") : ER25
	Type	-	BMT55
TAIL STOCK	Taper	-	MT#4 [MT#5]
	Quill Dia.	mm(in)	Ø65 (2.6") [Ø100 (3.9")]
	Quill Travel	mm(in)	80 (3.1") [120 (4.7")]
TANK CAPACITY	Travel	mm(in)	513.7 (20.2")
	Coolant Tank	l (gal)	150 (39.6)
	Lubricating Tank	l (gal)	1.8 (0.5)
POWER SUPPLY	Electric Power Supply	kVA	23
	Thickness of Power Cable	Sq	OVER 16
	Voltage	V/Hz	220/60 (200/50*)
MACHINE	Floor Space (L×W)	mm(in)	2,925×1,650 (115.2"×65")
	Height	mm(in)	1,820 (71.7")
	Weight	kg(lb)	4,200 (9,259)
NC	Controller	-	HYUNDAI WIA FANUC - SMART PLUS [HYUNDAI-iTROL]

\* ) Using 50Hz voltage instead of 60Hz may lower the output of motors. (excluding servo motors and inverter motors)  
 Specifications are subject to change without notice for improvement.

# CONTROLLER

## HYUNDAI WIA FANUC - SMART PLUS

[ ] : Option

Controlled axis / Display / Accuracy Compensation	
Control axes	2 axes (X, Z) / 3 axes (X, Z, C) / 4 axes (X,Z,Y,C) 5 axes (X, Z, B, C, A) / 6 axes (X, Z, Y, B, C, A) 7 axes (X1/Z1, X2/Z2, B2, C1/C2)
Simultaneously controlled axes	2 axes [Max. 4 axes]
Designation of spindle axes	3 axes [Max. 4 axes]
Least setting Unit	X, Z, Y, B axes : 0.001 mm (0.0001 inch) C, A axes : 0.001 deg
Least input increment	X, Z, Y, B axes : 0.001 mm (0.0001 inch) C, A axes : 0.001 deg
Inch / Metric conversion	G20 / G21
High response vector control	
Interlock	All axes / Each axis
Machine lock	All axes
Backlash compensation	± 0~9999 pulses (exc.Rapid traverse / Cutting feed)
Position switch	
LCD / MDI	15 inch LCD unit (with Touch Panel)
Feedback	Absolute motor feedback
Stored stroke check 1	Over travel
Stored stroke check 2, 3	
PMC axis control	
Operation	
Automatic operation (Memory)	
MDI operation	
DNC operation	Needed DNC software / CF card
Program restart	
Wrong operation prevention	
Program check function	Dry run
Single block	
Search function	Program Number / Sequence Number
Interpolation functions	
Nano interpolation	
Positioning	G00
Linear interpolation	G01
Circular interpolation	G02, G03
Exact stop mode	Single : G09, Continuous : G61
Dwell	G04, 0 ~ 9999.9999 sec
Skip	G31
Reference position return	1st reference : G28, 2nd reference : G30 Ref. position check : G27
Thread synchronous cutting	G33
Thread cutting retract	
Variable lead thread cutting	
Multi / Continuous threading	
Feed function / Acc. & Dec. control	
Manual feed	Rapid traverse Jog : 0~2.000 mm/min (79 ipm) Manual handle : x1, x10, x100 pulses Reference position return
Cutting Feed command	Direct input F code
Feedrate override	0 ~ 200% (10% Unit)
Rapid traverse override	1%, F25%, 50%, 100%
Override cancel	
Feed per minute	G98
Feed per revolution	G99
Look-ahead block	1 block
Program input	
Tape Code	EIA / ISO
Optional block skip	9 ea
Program stop / end	M00, M01 / M02, M30
Maximum command unit	± 999,999.999 mm (± 99,999.999 inch)
Plane selection	X-Y : G17 / Z-X : G18 / Y-Z : G19
Workpiece coordinate system	G52, G53, 6 pairs (G54 ~ G59)
Manual absolute	Fixed ON
Programmable data input	G10
Sub program call	10 folds nested
Custom macro	#100 ~ #199, #500 ~ #999
G code system	A, B/C
Programmable mirror image	G51.1, G50.1
G code preventing buffering	G41
Direct drawing dimension program	Including Chamfering / Corner R
Conversational Program	SmartGuide-i

Program input	
Multiple repetitive cycles I , II	
Canned cycle for turning	
Auxiliary function / Spindle speed function	
Auxiliary function	M & 4 digit
Level-up M Code	High speed / Multi / Bypass M code
Spindle speed function	S & 5 digit , Binary output
Spindle override	0% ~ 150% (10% Unit)
Multi position spindle orientation	M19 (S##)
Rigid tapping	
Constant surface speed control	G96, G97
Tool function / Tool compensation	
Tool function	T & 2 digit + Offset 2 digit
Tool life management	
Tool offset pairs	128 pairs
Tool nose radius compensation	G40, G41, G42
Geometry / Wear compensation	
Direct input of offset measured B	
Editing function	
Part program storage size	5,120m (2MB)
No. of registerable programs	1,000 ea
Program protect	
Background editing	
Extended part program editing	Copy, move and change of NC program
Memory card program edit	
Data input / output & Interface	
I/O interface	CF card, USB memory Embedded Ethernet interface
Screen hard copy	
External message	
External key input	
External workpiece number search	
Automatic data backup	
Setting, display and diagnosis	
Self-diagnosis function	
History display & Operation	Alarm & Operator message & Operation
Run hour / Parts count display	
Maintenance information	
Actual cutting feedrate display	
Display of spindle speed / T code	
Graphic display	
Operating monitor screen	Spindle / Servo load etc.
Power consumption monitoring	Spindle & Servo
Spindle / Servo setting screen	
Multi language display	Support 24 languages
Display language switching	Selection of 5 optional Languages
LCD Screen Saver	Screen saver
Unexpected disturbance torque	BST (Back spin torque limit)
Function for machine type	
Cs contour control (C & A axes)	Mill, MS, Y, SY, LF-Mill, TTMS, TTSY
Polar coordinate interpolation	Mill, MS, Y, SY, LF-Mill, TTMS, TTSY
Cylindrical interpolation	Mill, MS, Y, SY, LF-Mill, TTMS, TTSY
Polygon turning (2 Spindles)	Mill, MS, Y, SY, LF-Mill, TTMS, TTSY
Canned cycle for drilling	Mill, MS, Y, SY, LF-Mill, TTMS, TTSY
Spindle orientation expansion	MS, SY TTS, TTMS, TTSY
Spindle synchronous control	MS, SY TTS, TTMS, TTSY
Torque control	MS, SY TTS, TTMS, TTSY
Y axis offset	Y, SY, TTSY
Arbitrary angular control	Y, SY, TTSY
Composite / Superimposed control	MS, SY, TTS, TTMS, TTSY
Balance cutting	TTS, TTMS, TTSY
Option	
Fast ethernet	Needed option board
Data server	Needed option board
Protection of data at 8 levels	
Tool offset pairs	200 pairs
Helical interpolation	
Optional block skip	40 ea, 200 ea (AICC II)

Figures in inch are converted from metric values.

The FANUC controller specifications are subject to change based on the policy of company CNC supplying.

# CONTROLLER

## HYUNDAI-iTROL (SIEMENS 828D)

Controlled axis / Display / Accuracy Compensation		[ ] : Option ★ Needed technical consultation
Control axes	2 axes (X, Z) - Std. 3 axes (X, Z, C) - Mill 4 axes (X, Z, Y, C) - Y 5 axes (X, Z, B, C, A) - MS 6 axes (X, Y, Z, B, C, A) - SY	
Simultaneously controlled axes	Max. 4 axes	
Least setting Unit	X, Z, Y, B axes : 0.001 mm (0.0001 inch) C, A axes : 1 deg [0.001] deg	
Least input increment	X, Z, Y, B axes : 0.001 mm (0.0001 inch) C, A axes : 1 deg [0.001] deg	
Inch / Metric changeover	G70 (inch) / G71 (metric)	
Interlock	All axes / Each axis	
Backlash compensation		
Pitch error compensation	Leadscrew pitch error compensation 10.4 inch color LCD [15 inch color LCD (With Touch panel)]	
LCD / MDI		
Keyboard	QWERTY full keyboard	
Stored stroke check	Over travel	
<b>Operation</b>		
Automatic operation		
MDI operation		
Program restart		
Program check function	Dry run / Program check / Machine lock	
Single block		
Block search	Block search	
Reposition		
Working area limit	Working area limitations	
<b>Interpolation functions</b>		
Positioning	G00	
Linear interpolation	G01	
Circular interpolation	Circular interpolation CW (G02) Circular interpolation CCW (G03)	
Exact position stop	Single block exact stop (G09) Exact stop G60 (G601, G602, G603)	
Dwell	Dwell (G04)	
Reference position return	Return to reference point Return to 2nd reference point	
Helical interpolation		
Thread synchronous cutting		
Thread cutting retract		
Spline interpolation	Non-uniform rational B splines	
<b>Feed function / Acc. &amp; Dec. control</b>		
Manual feed	Rapid traverse Jog Manual handle Reference position return	
Cutting Feed command	Direct input F code	
Feedrate override	0 ~ 200% (10% Unit)	
Rapid traverse override	1%, 25%, 50%, 100%	
Feed per minute	G94	
Feed per revolution	G95	
Look-ahead block	1 block	
<b>Program input</b>		
ISO support	G291(ISO) / G290 (SIEMENS) (ISO G Code system-A)	
Optional block skip	2	
Program stop / end	M00, M01 / M02, M30	
Maximum command unit	± 999,999,999 mm, ± 99,999,999 inch	
Plane selection	X-Y : G17, X-Z : G18, Y-Z : G19 G54 ~ G57, G505~G549	
Workpiece coordinate system	G500 (Basic frame - setable zero offset) G53 (Work offset non modal)	
Sub program call	G153 (basic frame non modal)	
G code preventing buffering	11 folds nested	
Turning Cycle	STOPRE	
User Cycle	Turning programing (Cycle 93, 94, 95, 97)	
<b>Auxiliary function / Spindle speed function</b>		
Auxiliary function	M Code 4 digit	
Spindle speed function	S Code 5 digit	
Spindle override	0% ~ 150% (10% Unit)	
Spindle orientation	SPOS	
Rigid tapping		
Automatic mode interchange	Spindle / Axis mode	
Constant surface speed control	G96, G97	
Spindle speed limitation	LIMS	
<b>Tool function / Tool compensation</b>		
Tool function	Tool number & Tool name Tool : T + Offset : D	
Tool life management		
Tools in tool list	128 ea : Std. 256 ea : Mill 768 ea : Y, MS, SY	
Cutting Edges in tool list	256 ea : Std. 512 ea : Mill 1,536 ea : Y, MS, SY	
Tool nose radius compensation	ISO (G40, G41, G42)	
Geometry / Wear compensation		
Measurement of tool length		
Tool management function		
<b>Editing function</b>		
Part program storage size	3MB - Std. 5MB - Mill 10MB - Y, MS, SY	
No. of registerable programs	750 ea	
External Storage devices	Local network, Server, USB, Flash drive	
Background editing		
Extended part program editing	Copy, move and change of NC program	
Memory card program edit		
<b>Data input / output &amp; Interface</b>		
I/O interface	CF card interface (ONLY 10.4") USB memory interface Embedded Ethernet memory interface	
Screenshot		
<b>Setting, display and diagnosis</b>		
Self-diagnosis function		
History display & Operation	Alarm & Operator message & Operation	
Run hour / Parts count display		
Maintenance information		
Actual cutting feedrate display		
Display of spindle speed / T code		
Graphic display		
Operating monitor screen	Spindle / Servo load etc.	
Multi language display	Support 9 languages Chinese (Simplified/Traditional), English, French, German, Italian, Korean, Portuguese, Spanish	
LCD Screen Saver	[★ Support 22 languages : Inquiry need] Screen saver & Motion sensing	
<b>Function for machine type</b>		
Cs contour control (C & A axes)	Mill, MS, Y, SY model	
Polar coordinate interpolation	Mill, MS, Y, SY model	
Cylindrical interpolation	Mill, MS, Y, SY model	
Canned cycle for drilling	Mill, MS, Y, SY model	
[Polygon turning (CP-Basic)]	Mill, MS, Y, SY model	
[Hobbing / Skiving (CP-Comfort)]	Mill, MS, Y, SY model	
Spindle synchronous control	MS, SY model	
Servo tailstock function	MS, SY model	
<b>Option</b>		
Additional optional block skip	10	
Contour handwheel		
3D simulation		
Real time simulation		
Shop Turn	Machining step programming for turning	

Figures in inch are converted from metric values. | Specifications are subject to change without notice for improvement.



## EXPERIENCE THE NEW TECHNOLOGY

With its top-quality HYUNDAI WIA machine tool creates a new and better world.

You Tube HYUNDAI WIA MT  
[www.youtube.com/HYUNDAIWIAWT](http://www.youtube.com/HYUNDAIWIAWT)



<http://machine.hyundai-wia.com>  
HYUNDAI WIA Machine Tools  
Global Links

### HEADQUARTER

Changwon Technical Center/R&D Center/Factory 153, Jeongdong-ro, Seongsan-gu, Changwon-si, Gyeongsangnam-do, Korea TEL : +82 55 280 9114 FAX : +82 55 282 9114

Overseas Sales Team /R&D Center 37, Cheoldobangmulgwan-ro,Uiwang-si, Gyeonggi-do, Korea TEL : +82 31 8090 2539

### OVERSEAS OFFICES

HYUNDAI WIA Machine America corp. 450 Commerce Blvd, Carlstadt, NJ 07072, USA TEL : +1-201-987-7298

HYUNDAI WIA Europe GmbH Alexander-Fleming-Ring 57, 65428 Rüsselsheim Germany TEL : +49-0-6142-9256-0

HYUNDAI WIA Machine Tools China 2-3F, Bldg6, No.1535 Hongmei Road, Xuhui District, Shanghai, China TEL : +86-21-6427-9885

India Branch Office #4/169, 1st Floor, LOTTE BLDG, Rajiv Gandhi Salai, (OMR), Kandanchavadi, Chennai - 600096, Tamilnadu, India TEL : +91-76-0490-3348

Vietnam Branch Office Flat number 05, Service and Trade Center of Viet Huong Industrial Zone, Highway 13, Thuan Giao, Thuan An, Binh Duong, Vietnam TEL : +84-3-5399-5099